

COMPACT DISC PLAYER



DP-1060/2060

SERVICE MANUAL

KENWOOD

©1994-9 PRINTED IN KOREA

B51-4978-00 (K) 3880

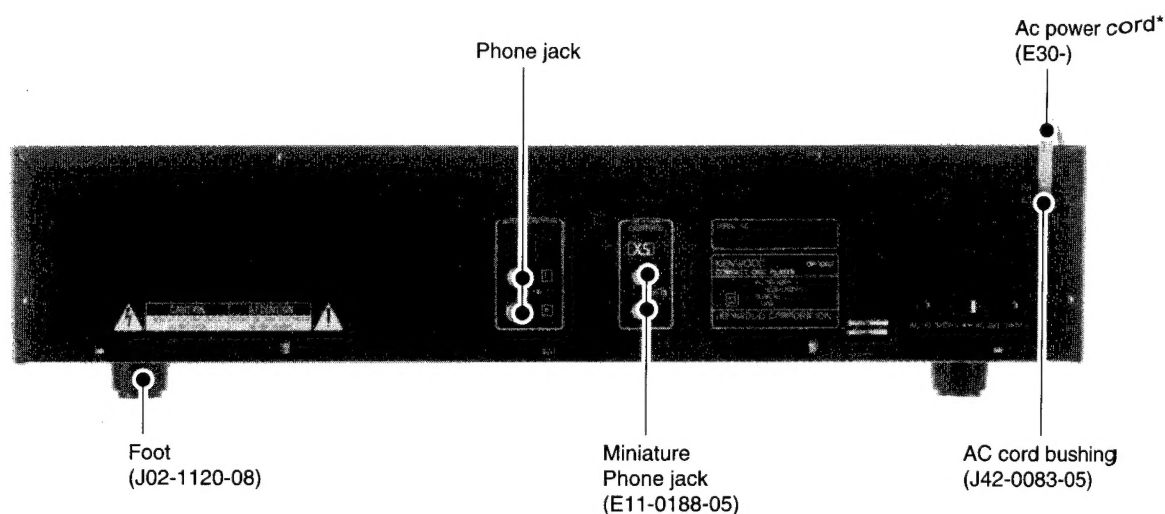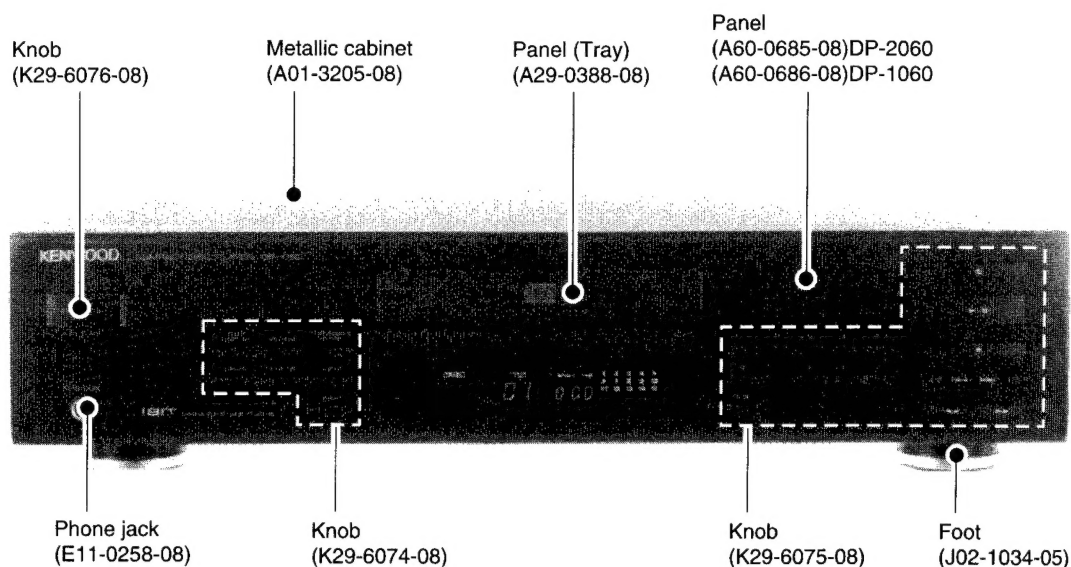

In compliance with Federal Regulations, following are reproductions of labels on, or inside the product relating to laser product safety.

KENWOOD -Corp. certifies this equipment conforms to DHHS Regulations No. 21 CFR 1040. 10, Chapter 1, Subchapter J.

DANGER : Laser radiation when open and interlock defeated. AVOID DIRECT EXPOSURE TO BEAM


Photo is DP-1060

External view of DP-2060 is same as DP-1060


ACCESSORIES/CAUTIONS

Accessories


- Audio cord 1
(E30-0505-05)



- System control cord 1
(E30-2733-05)




- Remote control unit 1
(DP-2060 only)
(A70-0983-05)



Battery cover
(A09-0170-08)

- Batteries (R6/AA) 2
(DP-2060 only)




Cautions

Note related to transportation and movement

Before transporting or moving the CD PLAYER, carry out the following operations.

1. Turn the power ON but do not load a disc.
2. Wait a few seconds and verify that the display shown appears.
3. Turn the power OFF.



Beware of condensation

When water vapor comes into contact with the surface of cold material, water drops are produced.


If condensation occurs, correct operation may not be possible, or the unit may not function correctly.

This is not a malfunction, however, the unit should be dried. (To do this, turn the POWER switch ON and leave the unit as it is for several hours.)

Be especially careful in the following conditions:


- When the unit is brought from a cold place to a warm place, and there is a large temperature difference.
- When a heater starts operating.
- When the unit is brought from an air-conditioned place to a place of high temperature with high humidity.
- When there is a large difference between the internal temperature of the unit and the ambient temperature, or in conditions where condensation occurs easily.

CONTROL

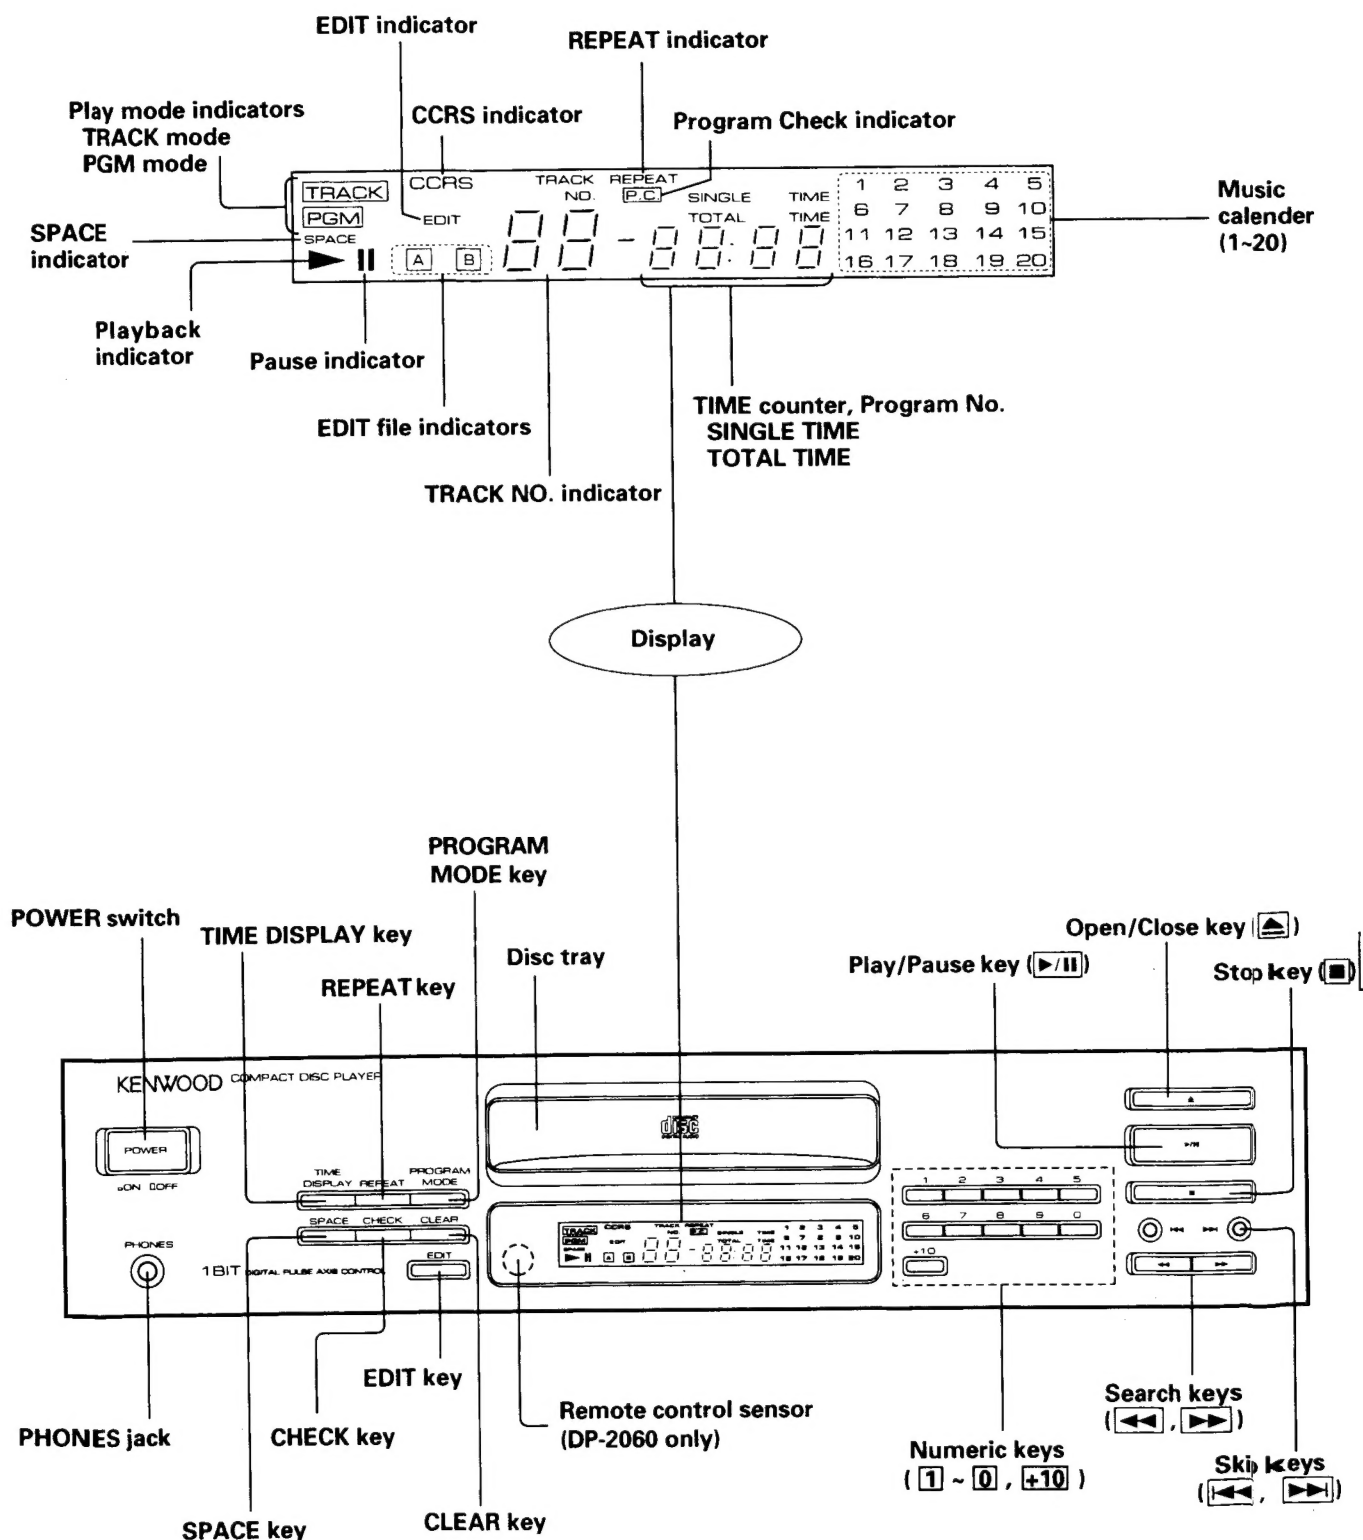



REMOTE CONTROL

The operations of each are the same as those of the keys in the unit.

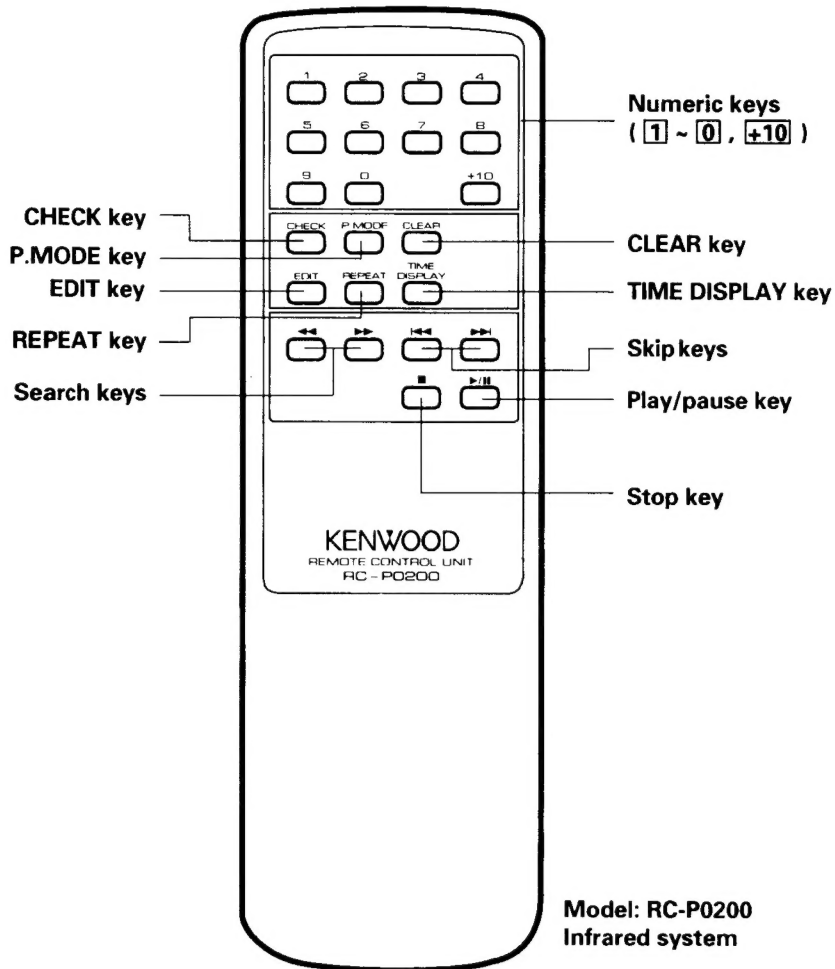

■ Loading batteries

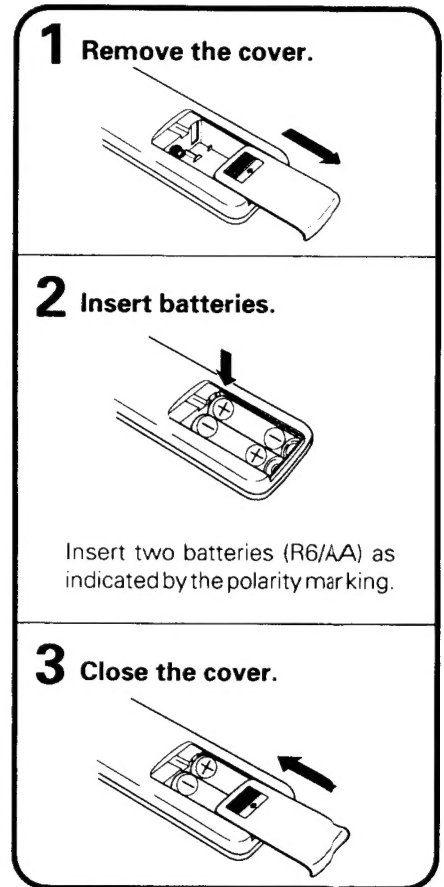

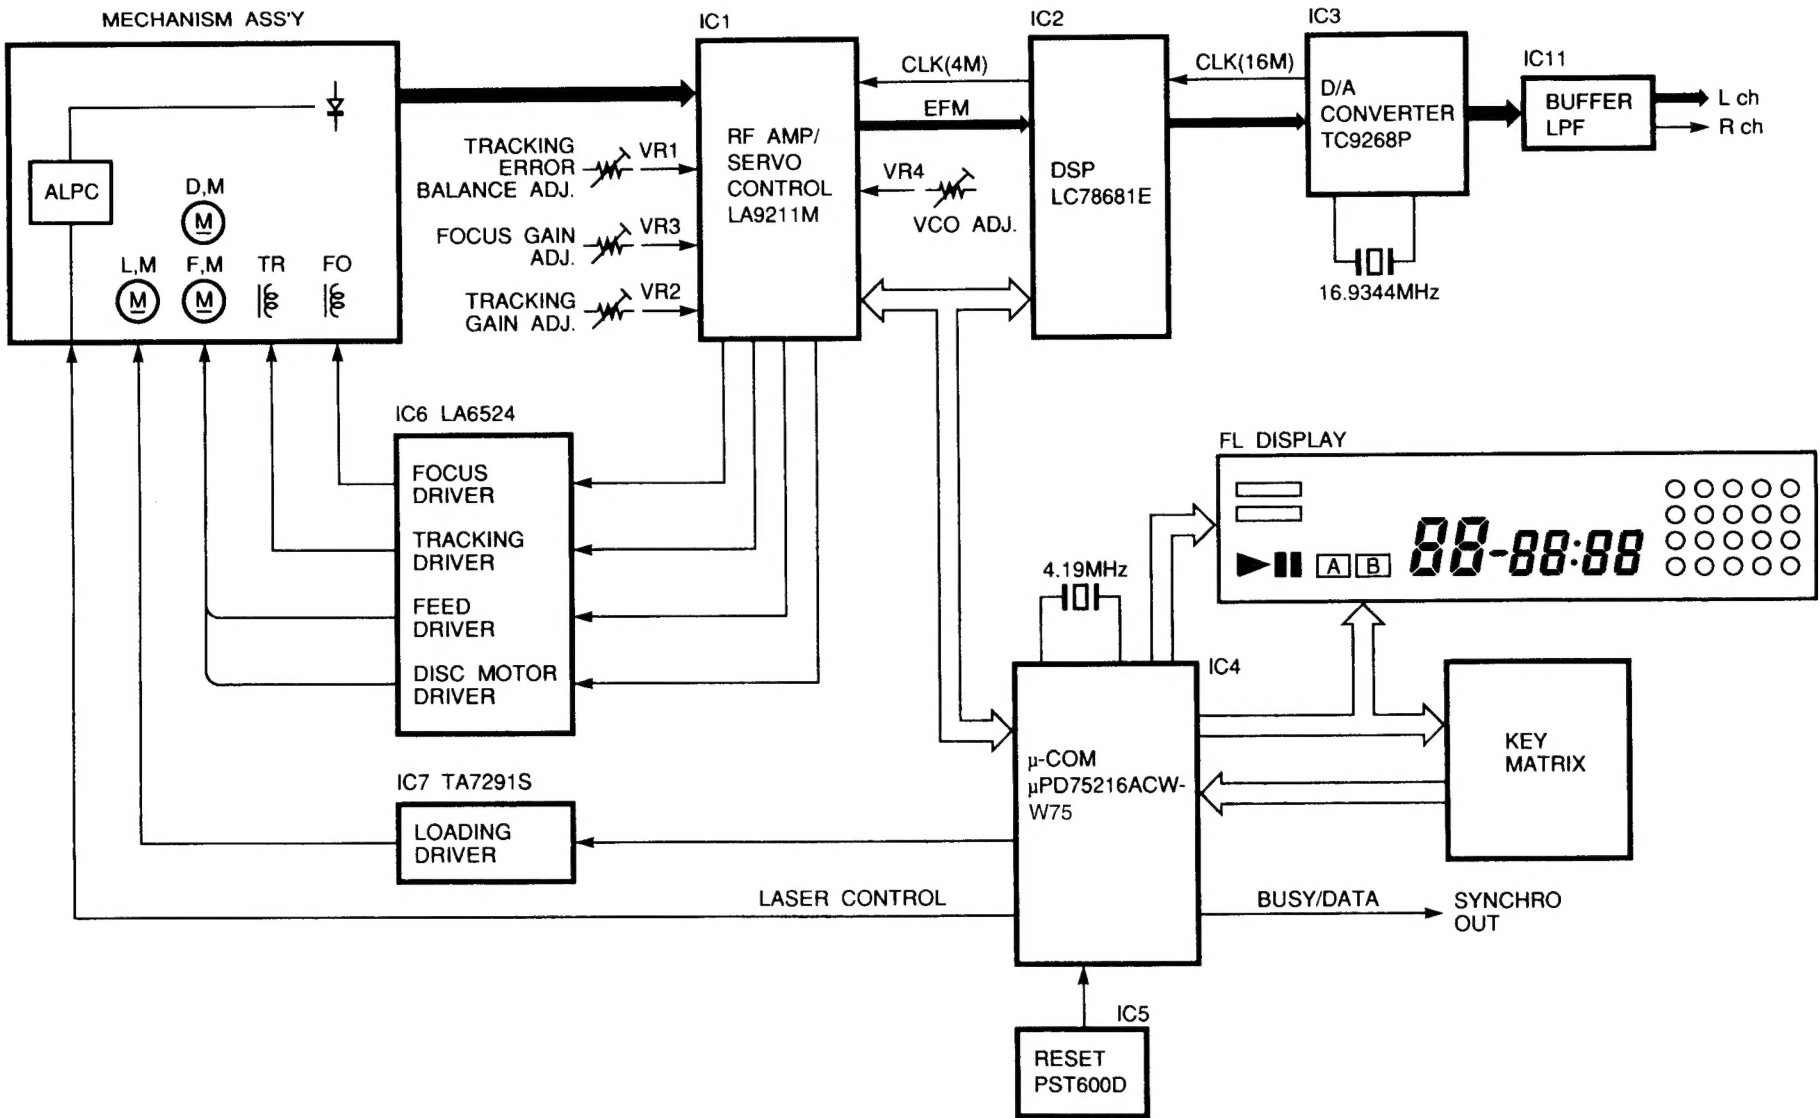

BLOCK DIAGRAM


DP-1060/2060

CIRCUIT DESCRIPTION

1. Test mode

1-1. Setting the test mode

This microprocessor built in this unit can be put to TEST MODE (SW10).

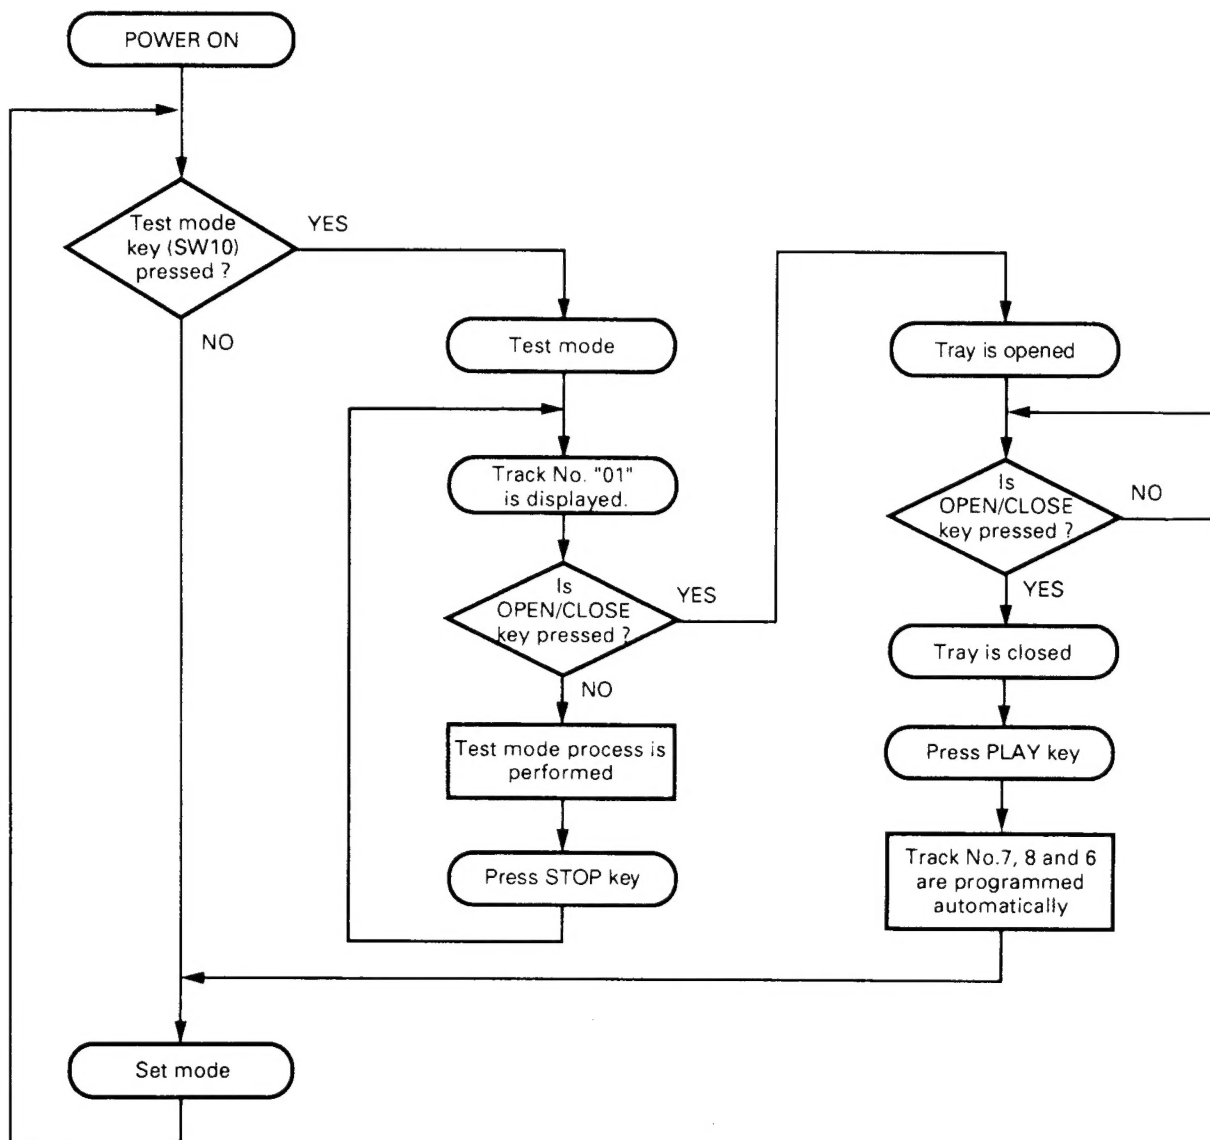

CIRCUIT DESCRIPTION

1-2. Key and functions valid in test mode

No.	Input key	Function	Track No. display																																			
1	PLAY	(1) Focusing servo ON (2) Tracking servo ON (3) Feed vervo ON	TRACK NO. 05 ↓ Displayed for a few seconds after completion (1), (2) and (3). ↓ Disc Track No. is displayed.																																			
2	CHECK or Number "0" key	(1) Focusing servo ON (2) Tracking servo OFF (3) Feed servo OFF	TRACK NO. 03																																			
3	STOP	(1) Focusing servo OFF (2) Tracking servo OFF (3) Feed servo OFF	TRACK NO. 01																																			
4	▶▶	In the STOP mode, moves the pickup slightly toward the outer position of disc. When feed servo is ON, sets the track gain to "H".	-																																			
5	◀◀	In the STOP mode, moves the pickup slightly toward the inner position of disc. When feed servo is ON, sets the track gain to "L".	-																																			
6	UP ▶▶	Turns all FL display lamps ON.	TRACK NO. 88																																			
7	DOWN ◀◀	Turns all FL display lamps OFF. "TRACK NO." is lighted.	TRACK NO. 88																																			
8	+10	Playback Track No.1 under High-speed mode (If not open tray, SPACE key function is available.)	-																																			
9	SPACE	Set playback mode to High-speed or Normal.	-																																			
10	P. MODE	Track No. 7, 8, and 6 (High-speed) are programmed and playback from Track No.7. The test mode is canceled.	-																																			
11	OPEN/CLOSE	When the tray is opened then closed. Track No. 7, 8, and 6 are programmed and set is in STOP mode. The test mode is canceled.	TRACK NO. 00																																			
12	Numeric key (1 ~ 9)	Jumps tracks as shown below. <table><tr><td>Key</td><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td></tr><tr><td>Number of tracks</td><td>1</td><td>4</td><td>128</td><td>512</td><td>1000</td></tr><tr><td>Direction</td><td colspan="5">Outer</td></tr><tr><td>Key</td><td>6</td><td>7</td><td>8</td><td>9</td><td rowspan="3"></td></tr><tr><td>Number of tracks</td><td>1</td><td>4</td><td>128</td><td>512</td></tr><tr><td>Direction</td><td colspan="5">Inner</td></tr></table>	Key	1	2	3	4	5	Number of tracks	1	4	128	512	1000	Direction	Outer					Key	6	7	8	9		Number of tracks	1	4	128	512	Direction	Inner					-
Key	1	2	3	4	5																																	
Number of tracks	1	4	128	512	1000																																	
Direction	Outer																																					
Key	6	7	8	9																																		
Number of tracks	1	4	128	512																																		
Direction	Inner																																					
13	REPEAT	(1) Tray Opened (2) Laser ON The REPEAT function is canceled when the tray is closed by pressing the tray. "REPEAT" figures is lighted.	TRACK NO. 02																																			


REPEAT mode : Press "REPEAT" key → Press "OPEN/CLOSE" key → Press "REPEAT" key...

ADJUSTMENT



No.	ITEM	INPUT SETTING	OUTPUT SETTING	PLAYER SETTING	ALIGNMENT POINT	ALIGN FOR	FIG.
1	VCO	Test disc Type 4	Connect the frequency counter to "VCO" and GND.	Turn on the SW10 (TEST MODE) to enter the test mode. Press the STOP key. Then, confirm that the display is "01"	VR4	4.05MHz \pm 15kHz	(a)
2	TRACKING ERROR BALANCE	Test disc Type 4	Connect the oscilloscope to "T.ER".	Press the OPEN/CLOSE key to open the tray. Reset to TEST mode. Then, press the CHECK key. Confirm that the display is "03".	VR1	Symmetry between upper and lower patterns, or DC=0 \pm 0.05V	(b)
3	FOCUS GAIN	Test disc Type 4 Apply signal of 1kHz, 0.5Vrms to R61(F.P. - F.E.).	Connect a L.P.F. to R61 (F.P. - F.E.) to which connect two AC voltmeters.	Press the PLAY key. Confirm that the display is "05".	VR3	Two VTVMs should read the same value.	(c)
4	TRACKING GAIN	Test disc Type 4 Apply signal of 1kHz, 0.5Vrms to R63(T.P. - T.E.).	Connect a L.P.F. to R63 (T.P. - T.E.) to which connect two AC voltmeters.	Press the PLAY key. Confirm that the display is "05".	VR2	Two VTVMs should read the same value.	(d)
5	H.F. LEVEL CONFIRMATION	Test disc Type 4	Connect the oscilloscope to "H.F.".	Press the PLAY key. Confirm that the display is "05".	-	1.5Vp-p \sim 1.5Vp-p	(e)

(NOTE) Type 4 disc : SONY YEDS-18 TEST DISC or equivalent.
Adjustment procedures are in TEST MODE.

(c) Focus gain

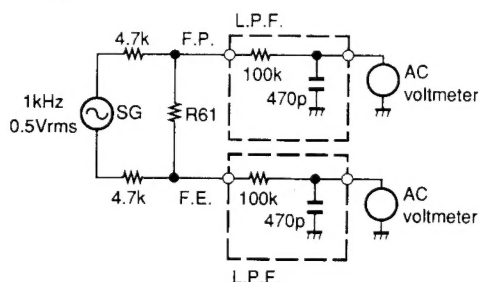


(d) Tracking gain

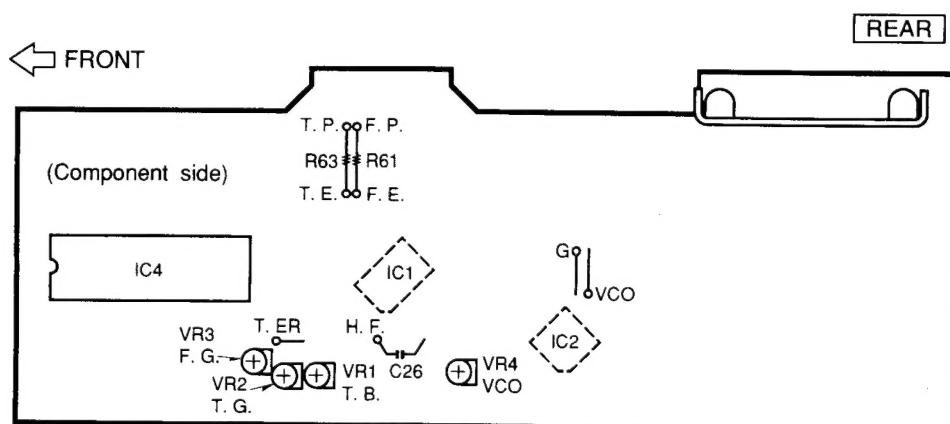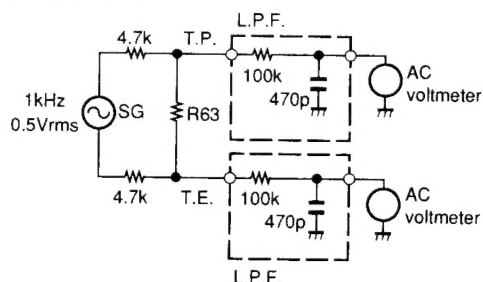


ADJUSTMENT

RF level, TE waveform

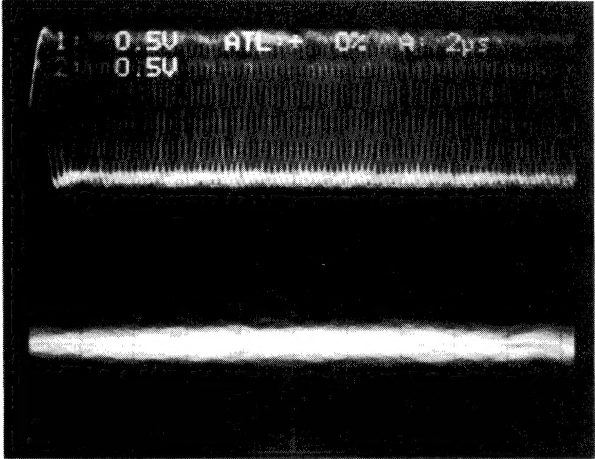


- RF signal and E.Spot signal in test mode (PLAY).
- If the diffraction grating has been adjusted properly, the influence of triggering is observed on the E.Spot waveform of approx. 18µs after RF signal, in the form of a projection.

(b) Tracking error balance

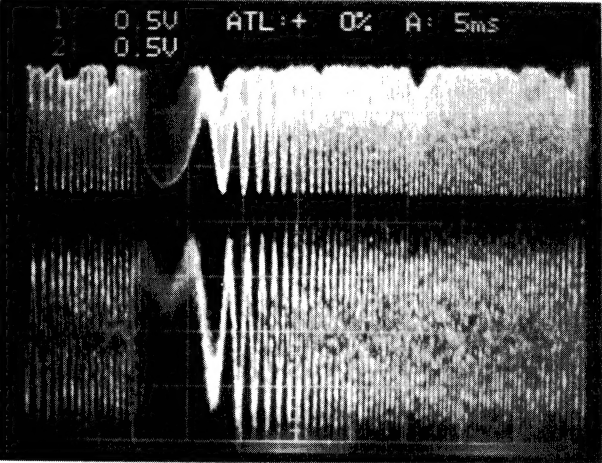

- RF signal and T.Error signal; in test mode (Focusing ON). (Disc type 4)
- Adjust T.Error so that the waveform is symmetrical above and below 0V. (VR 1)

PC BOARD (COMPONENT SIDE VIEW)

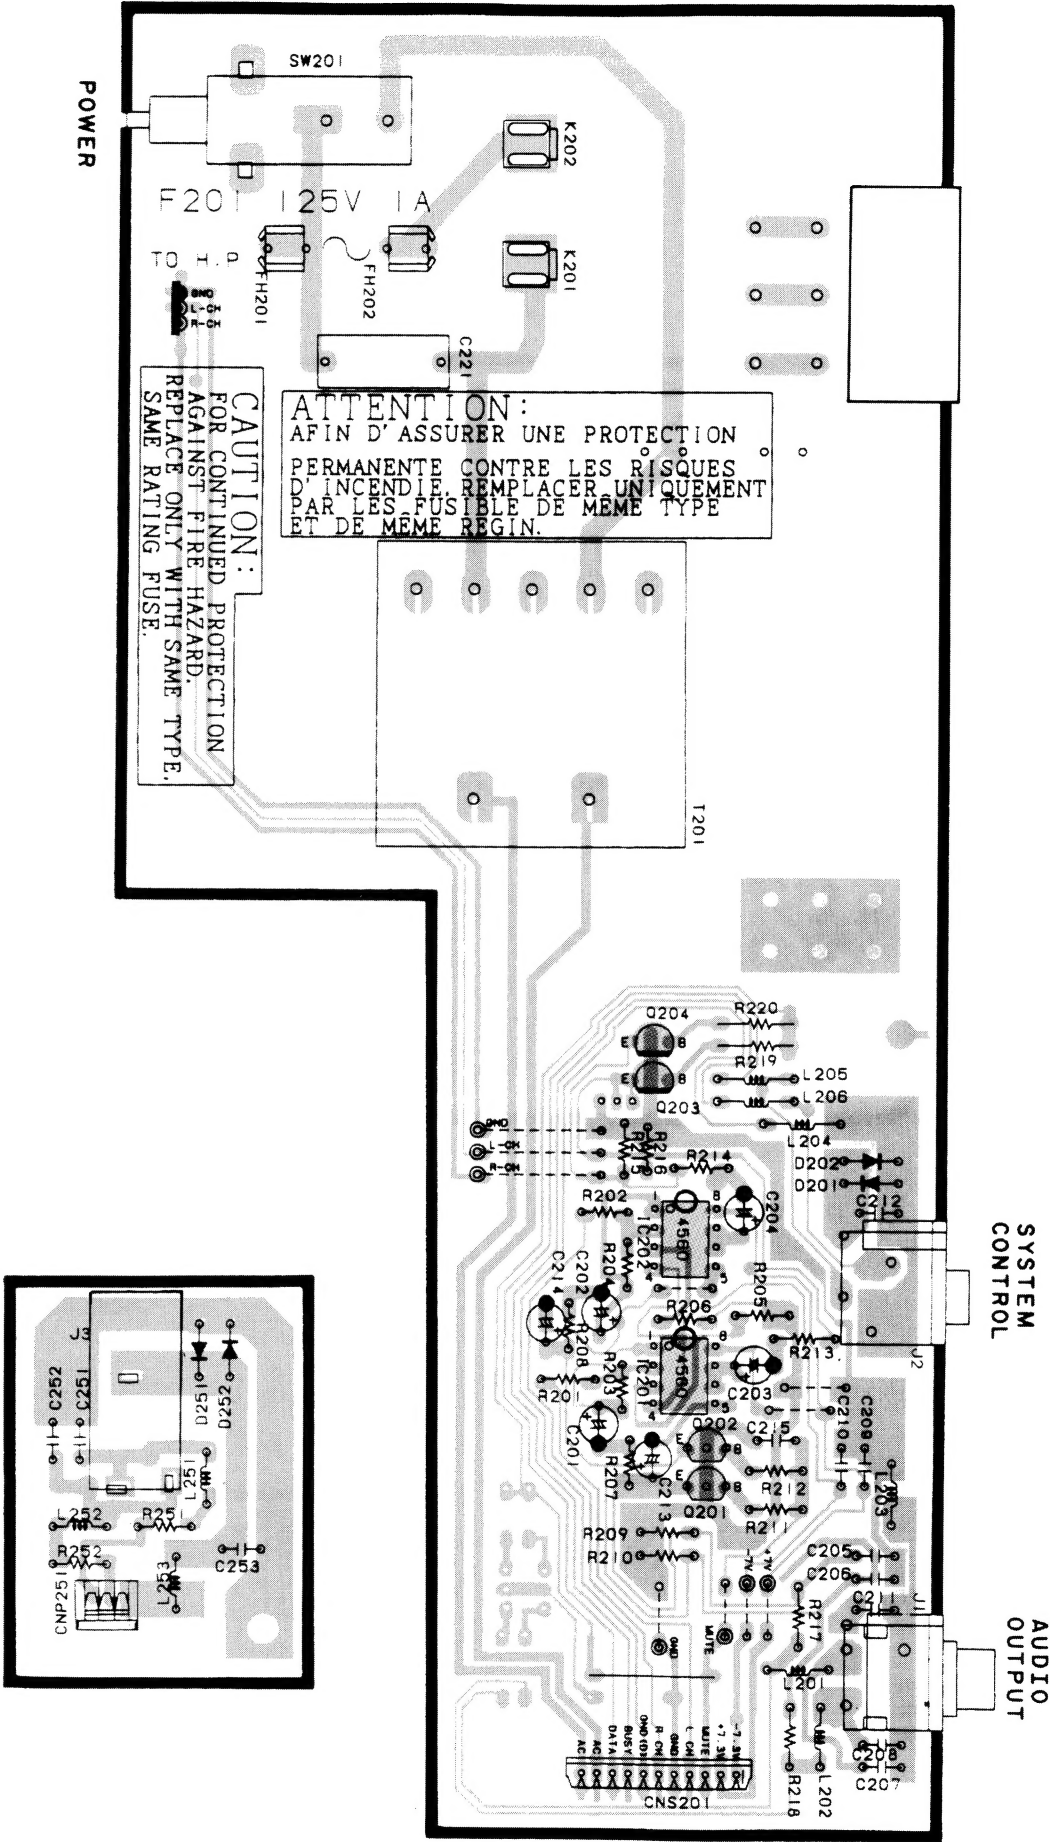


Refer to the schematic diagram for the value of resistors and capacitors.

PC BOARD (COMPONENT SIDE VIEW)


(c) Focus gain :

Two VTVMs should read the same value.

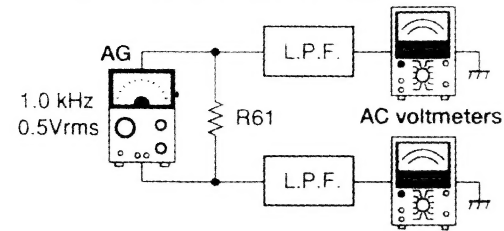


(d) Tracking gain :

Two VTVMs should read the same value.

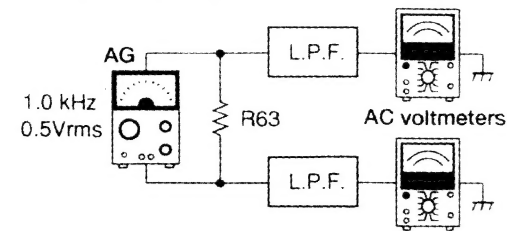

Frequency counter

(a) VCO : 4.05MHz \pm 15kHz

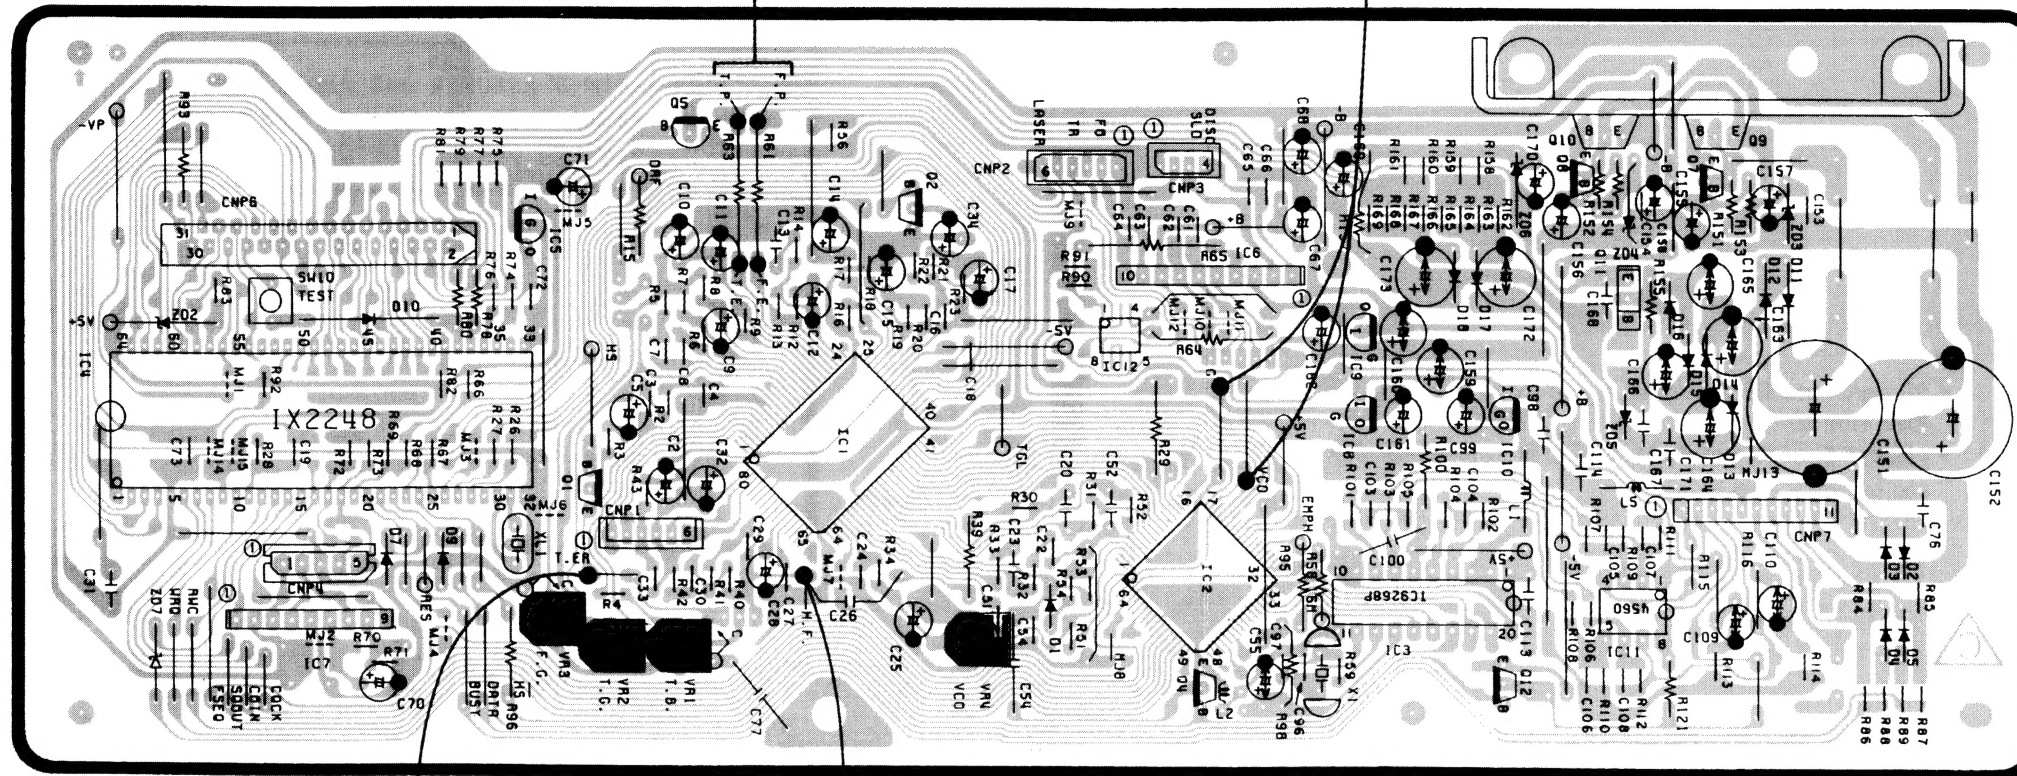

(b) Tracking error balance :



Symmetry between
upper and lower
or DC=0 \pm 0.05V

Oscilloscope

(e) H.F Level confirmation :

1.5Vp-p~2.5Vp-p


Oscilloscope

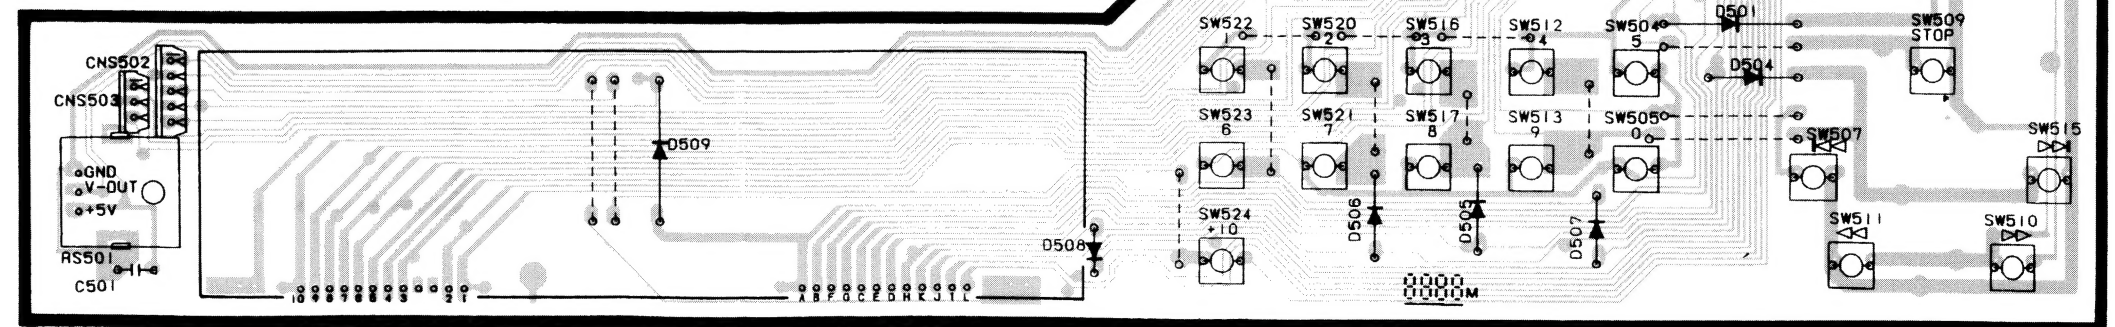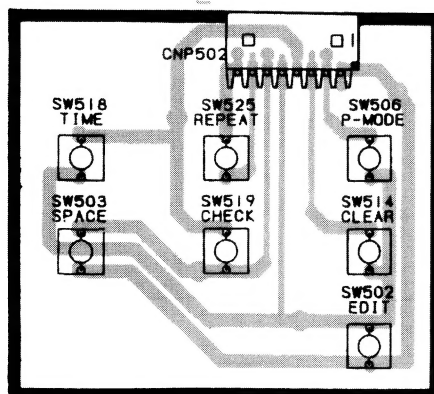

PC BOARD (COMPONENT SIDE VIEW)


(c) Focus gain :

Two VTVMs should read the same value.

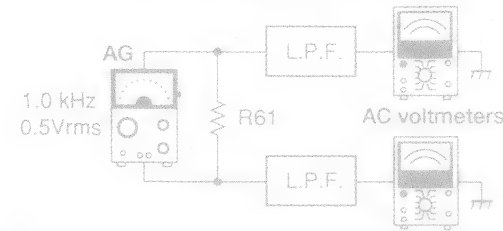


(d) Tracking gain :

Two VTVMs should read the same value.

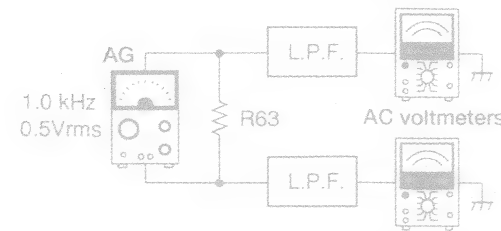

Frequency counter

(a) VCO : 4.05MHz \pm 15kHz

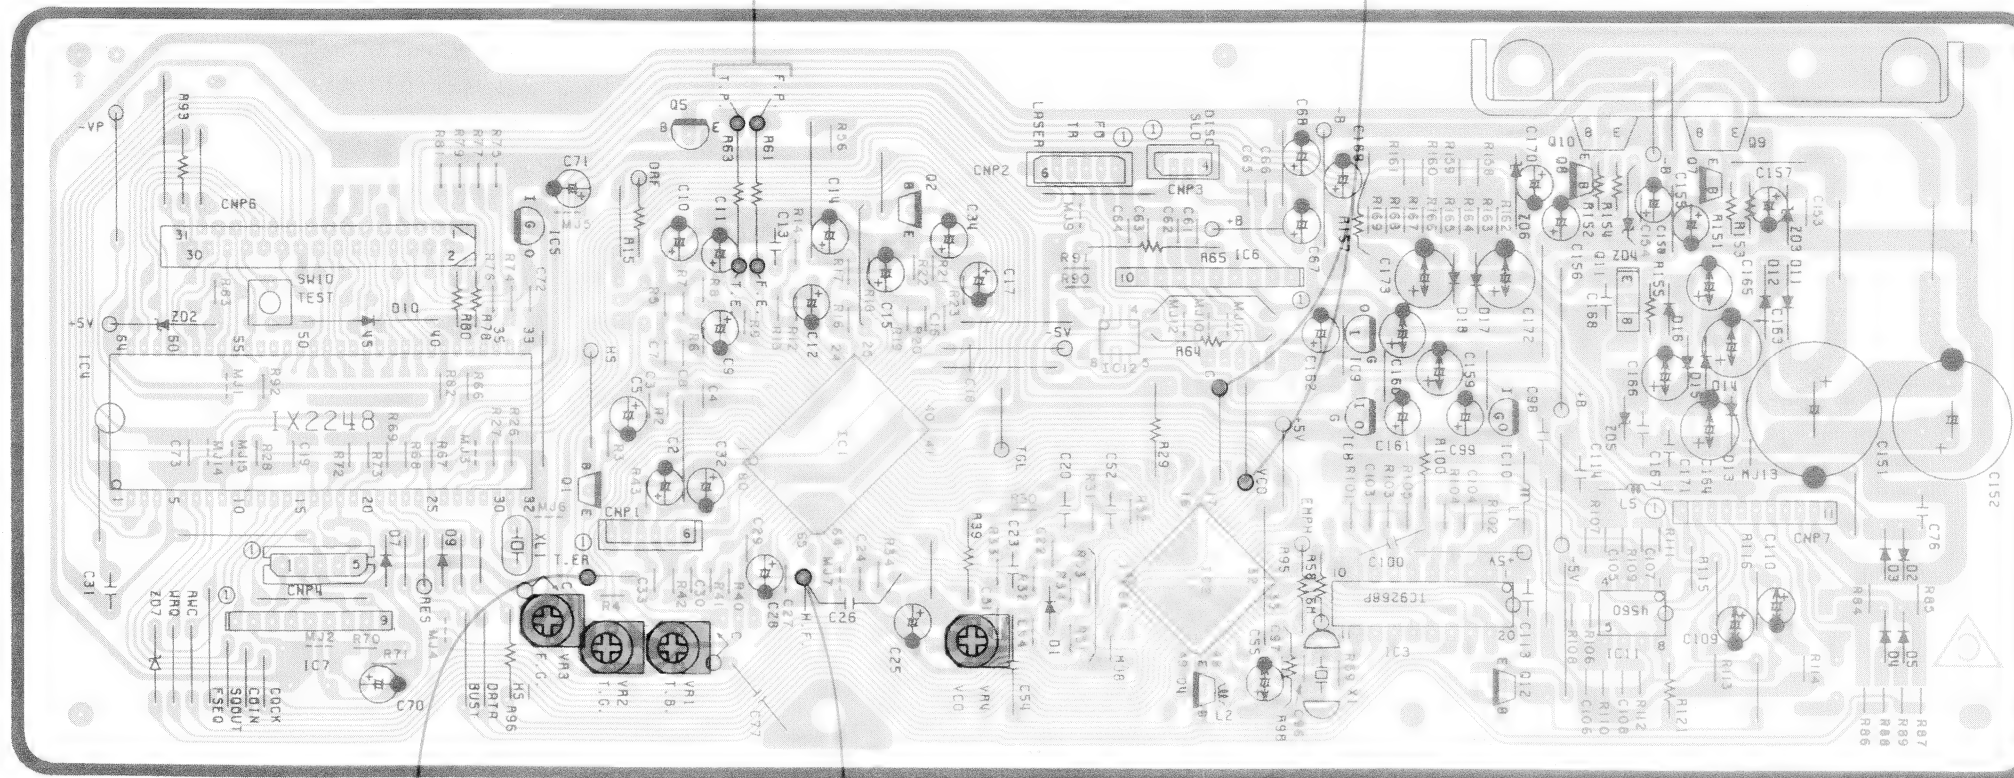



(b) Tracking error balance :


Symmetry between
upper and lower
or DC=0 \pm 0.05V


Oscilloscope

(e) H.F Level confirmation :
1.5Vp-p-2.5Vp-p

Oscilloscope

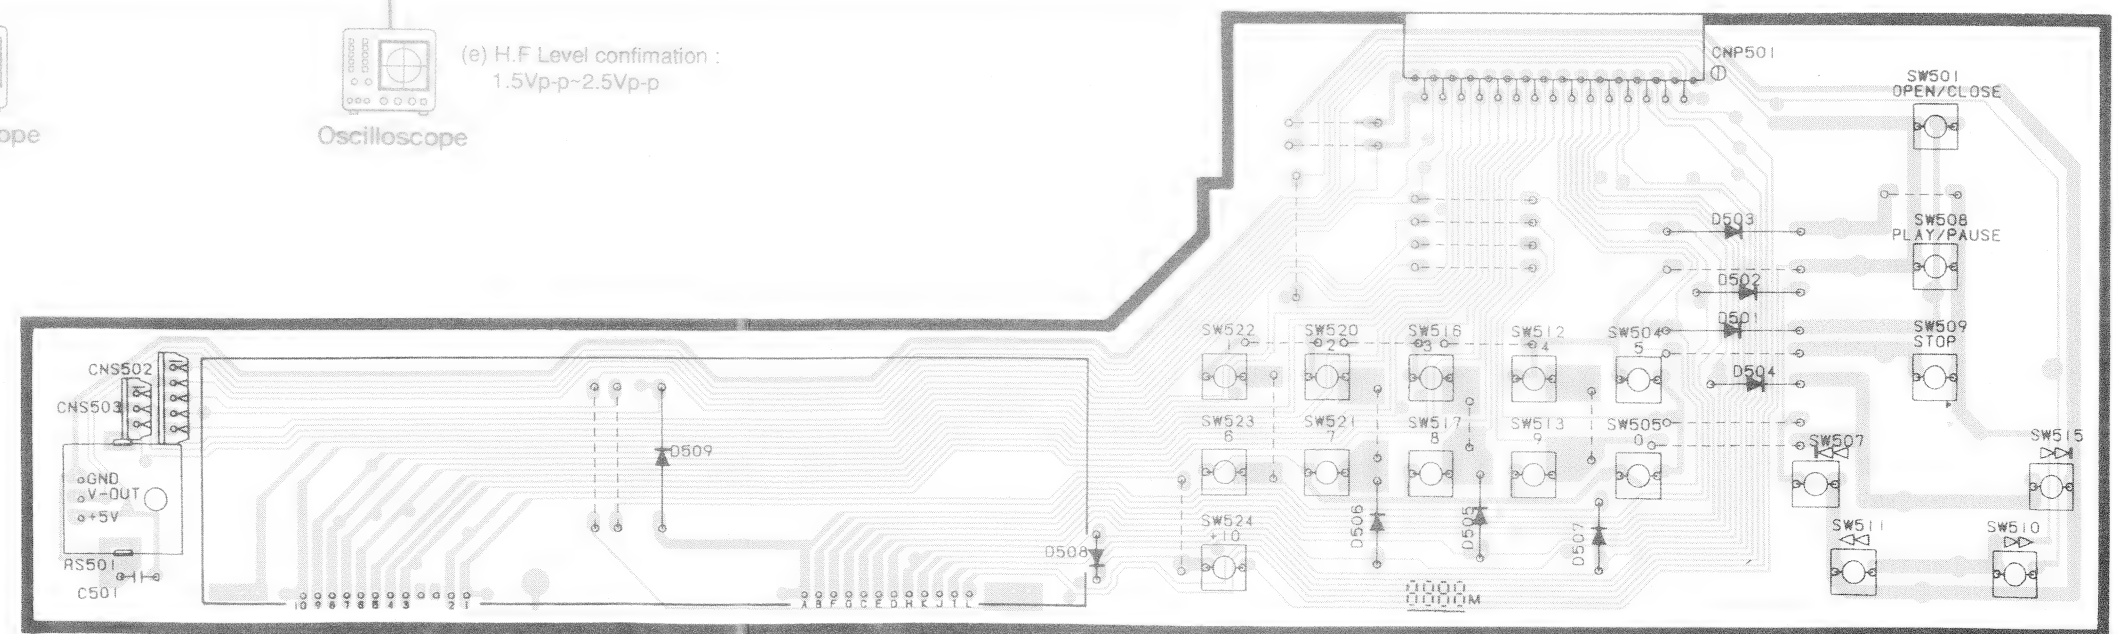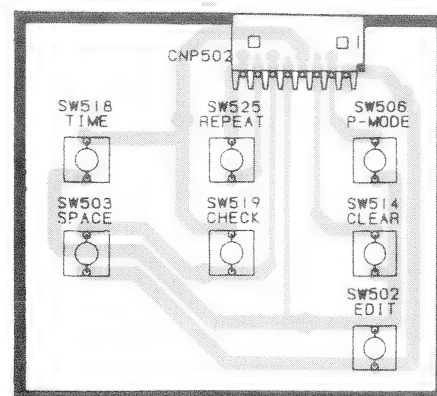

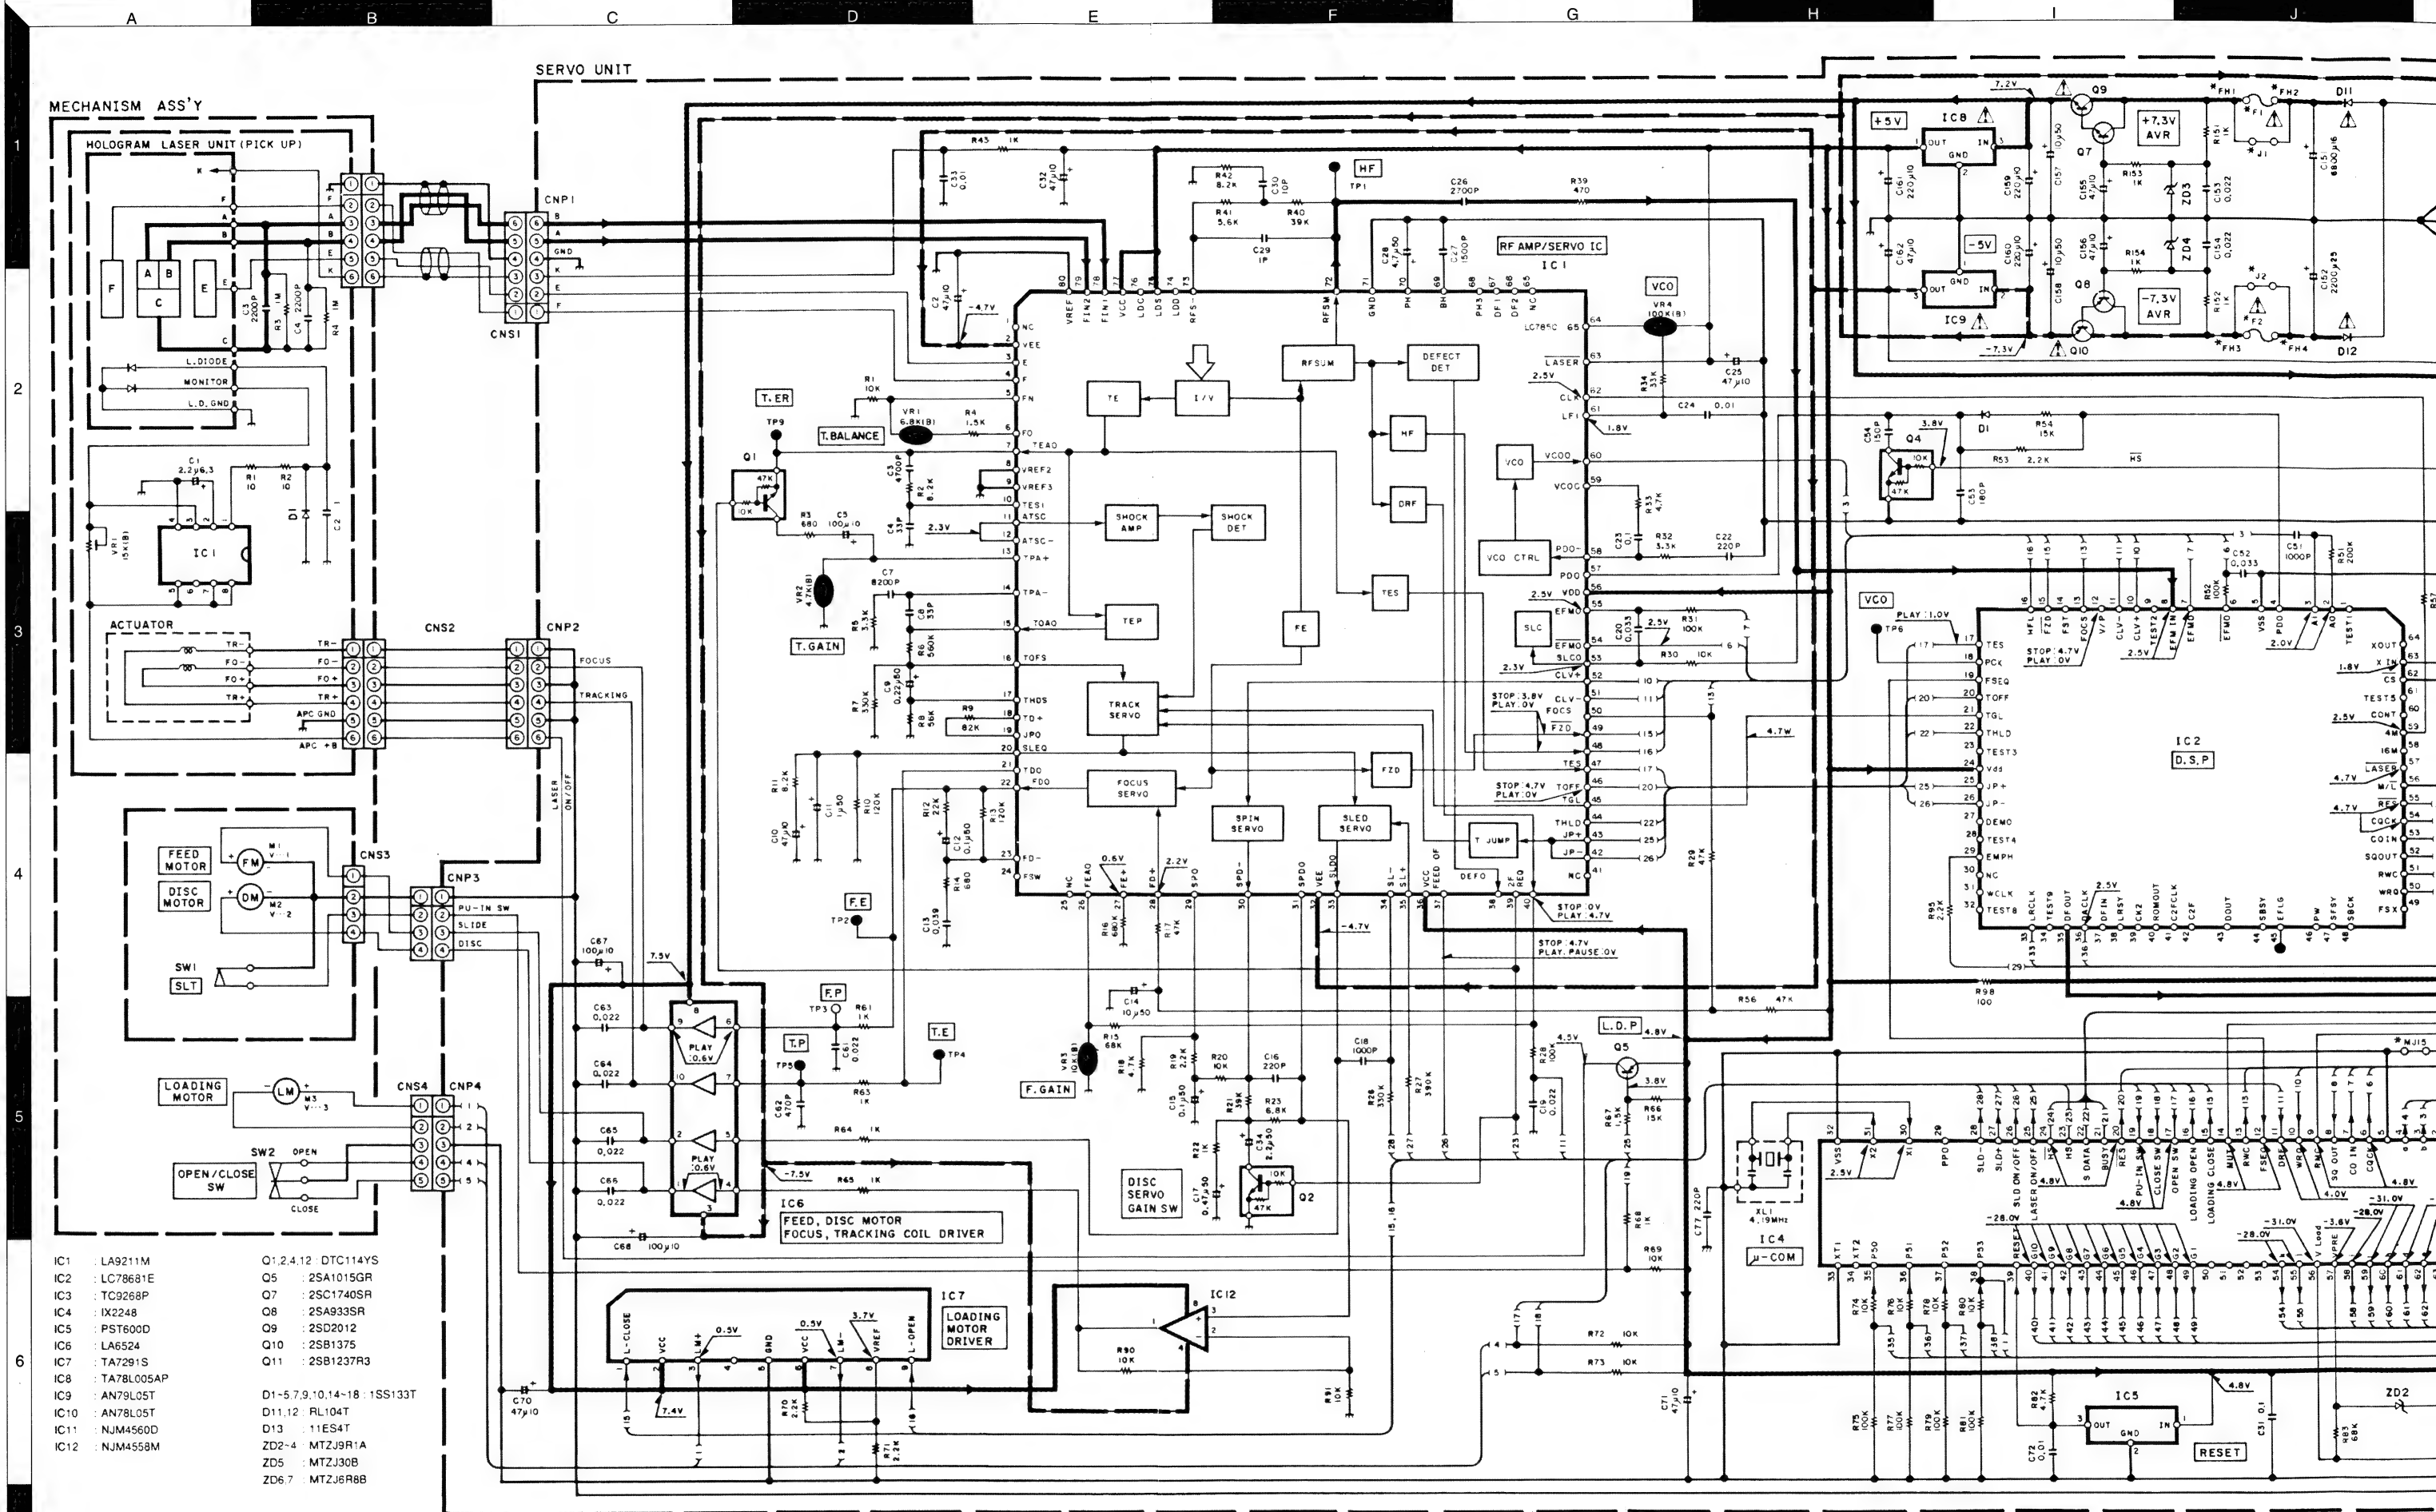


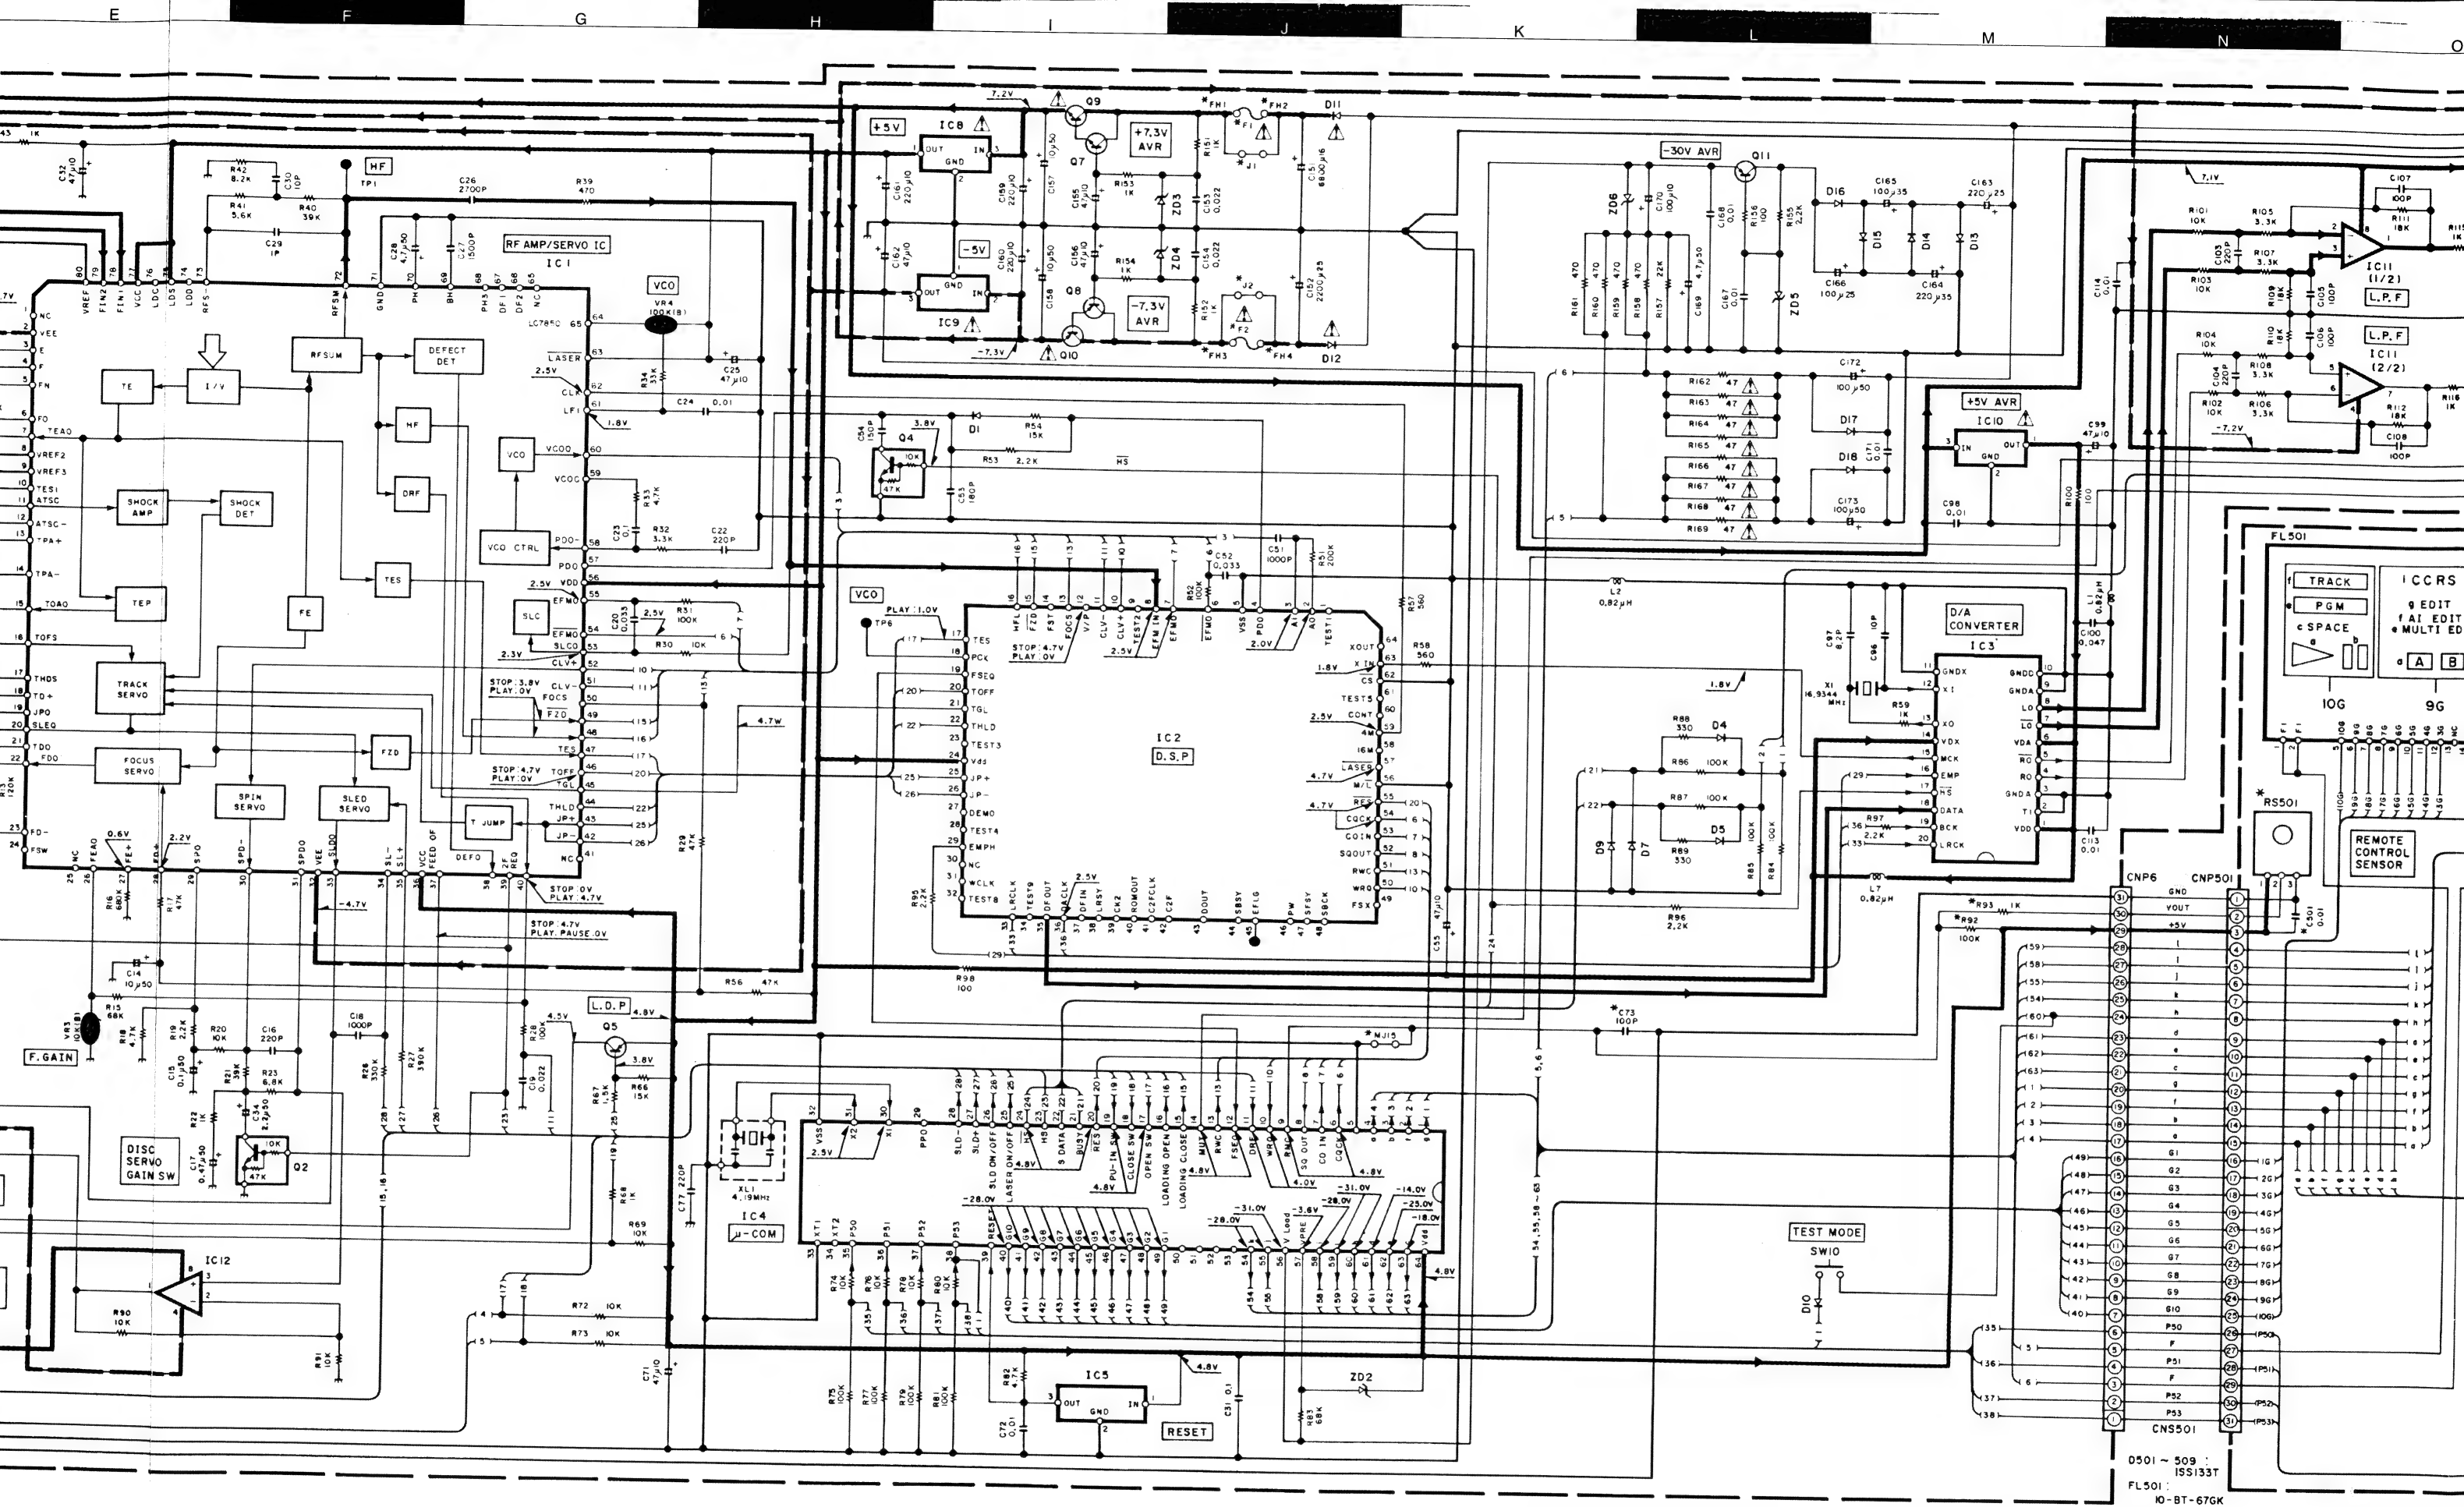

recommended parts (refer to parts list). Δ indicates safety critical components.
carried out (exposed parts are acceptably insulated from the supply circuit)

• DC voltages are as measured with a high impedance voltmeter. Values may vary slightly due to variations between individual instruments or/and units.


DTC114YS




2SB1375
2SD2012



NJM4560D




0501 ~ 509 :
ISS133T
FL501 :
10-BT-67GK

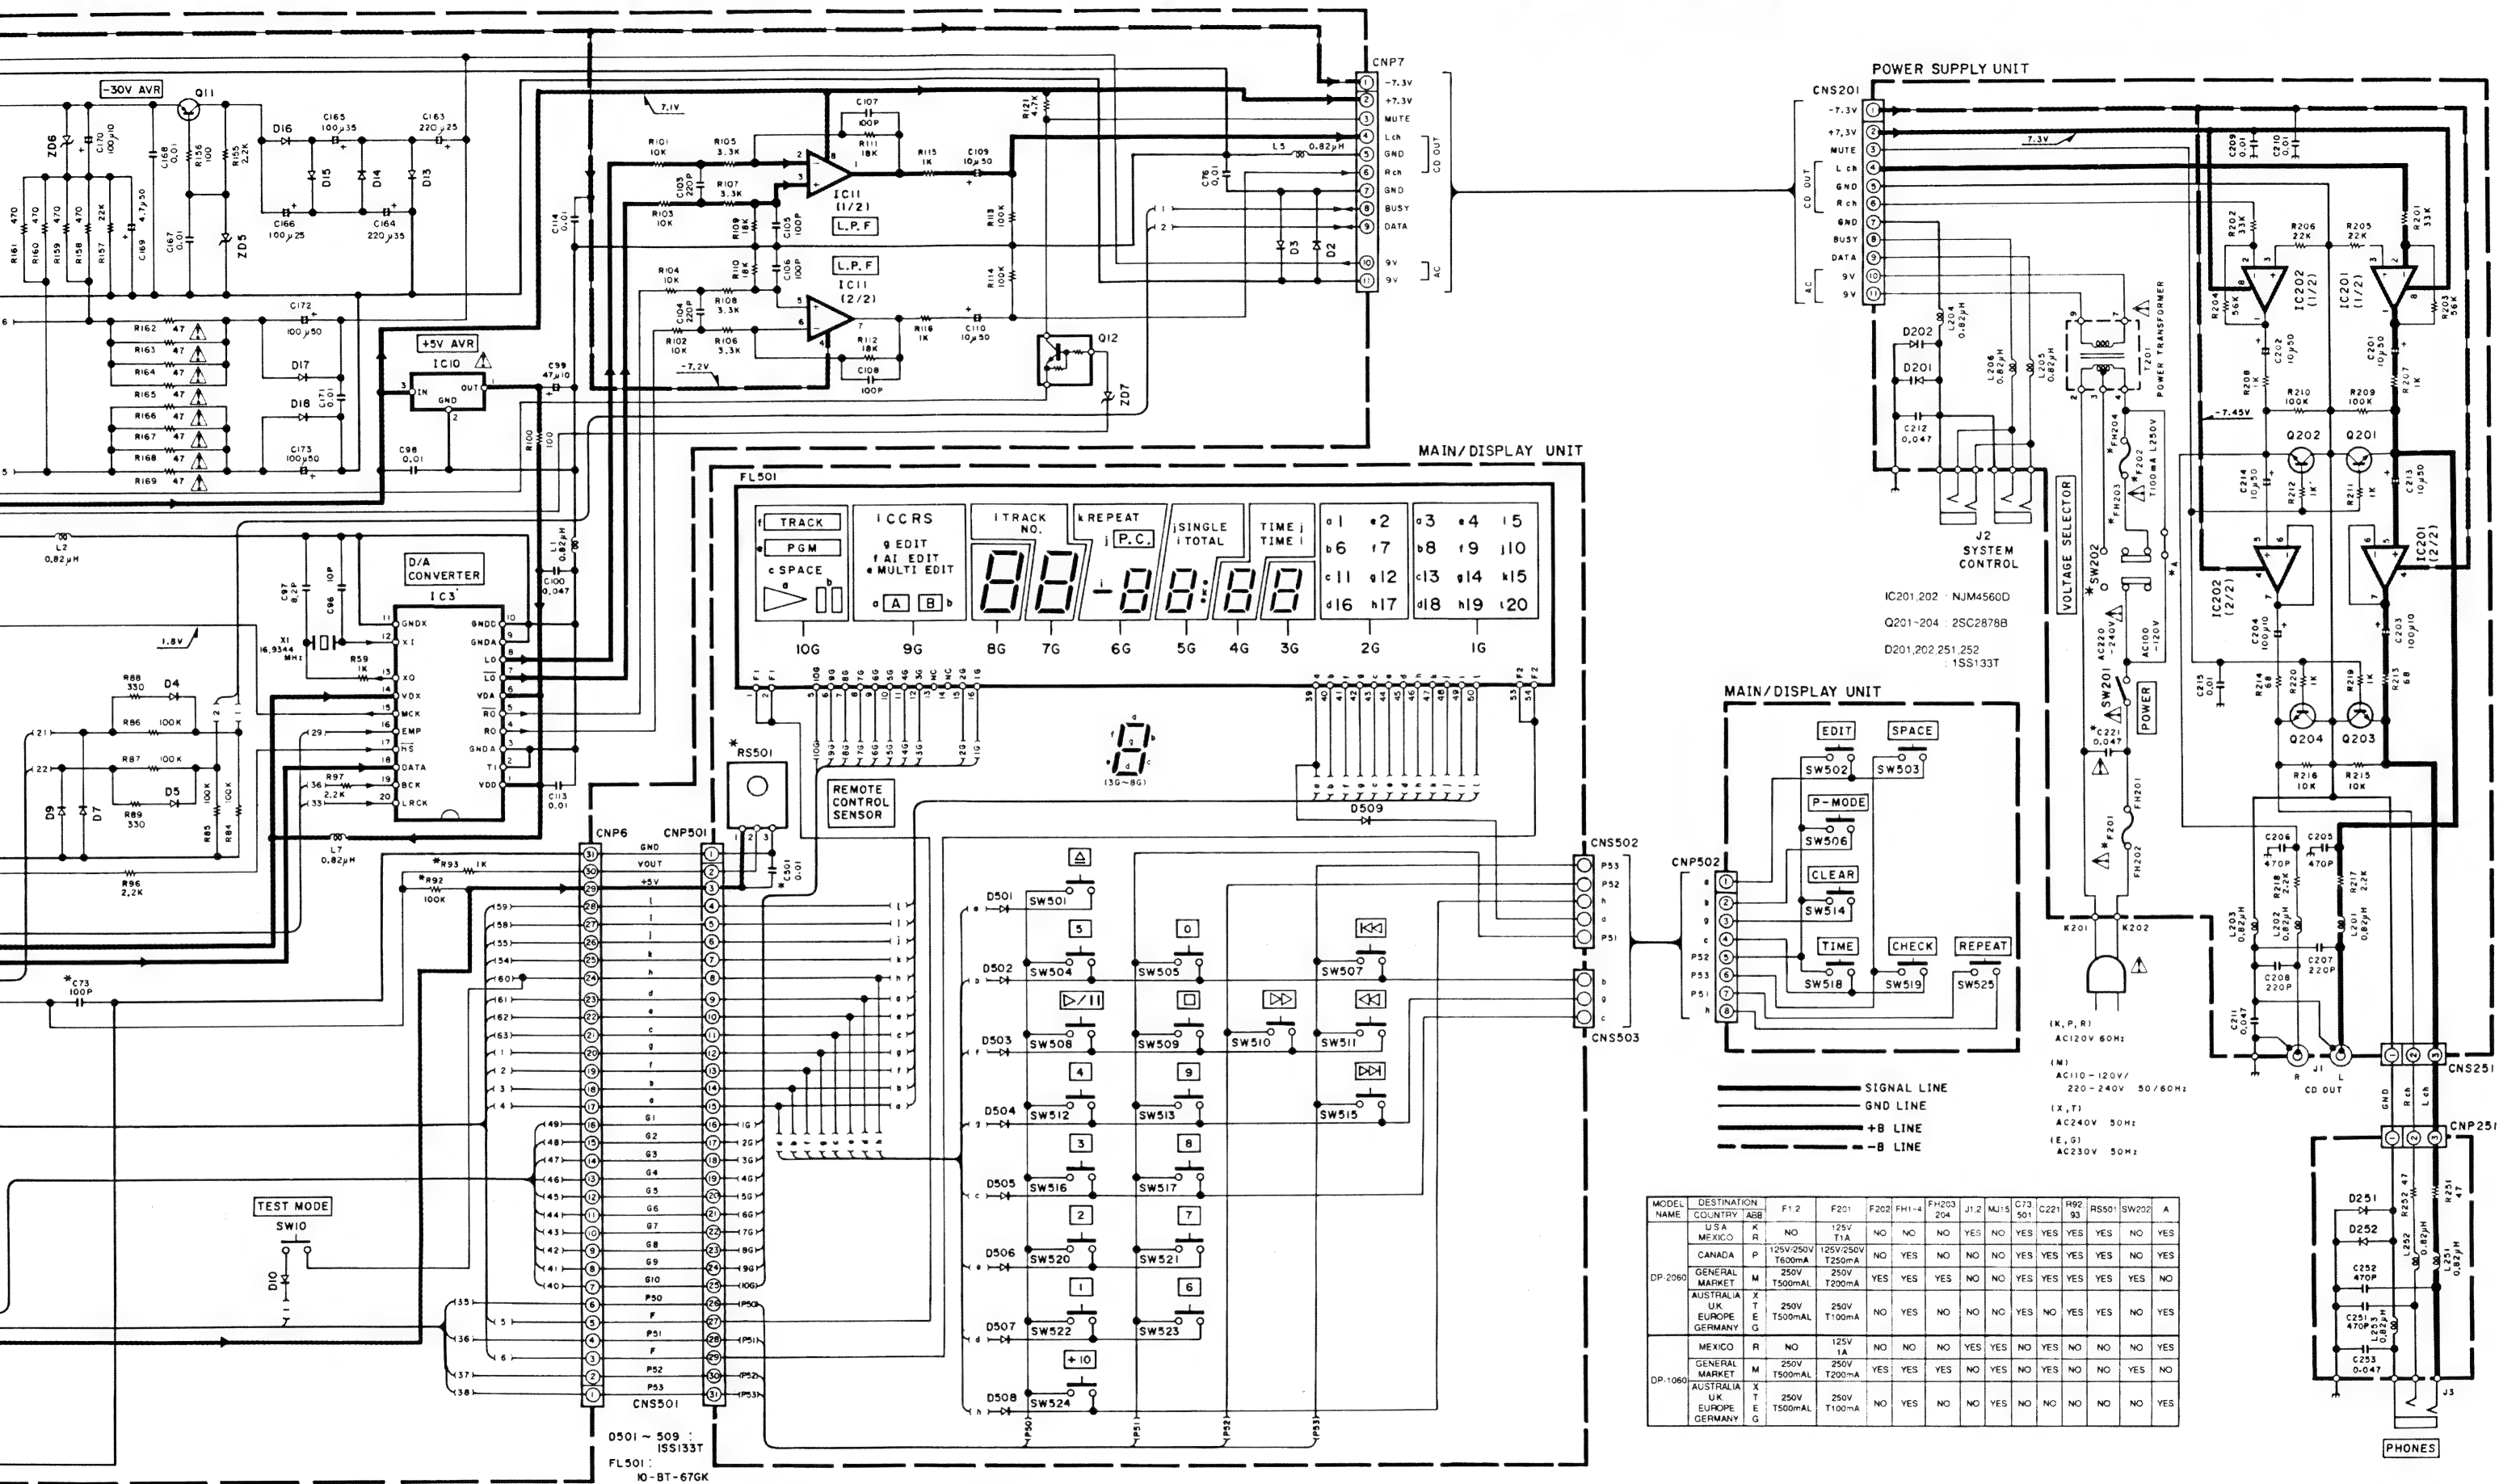


MODEL NAME	DESTINATION	COUNTRY	ABB	F12	F201	F202	FH1-4	FH203	J12	MJ15	C73	C221	R92	RS501	SW202	A
DP-2060	USA	USA	A	NO	125V T1A	NO	NO	NO	YES	NO	YES	YES	YES	YES	NO	YES
	MEXICO	MEXICO	M	NO	125V/250V T250mA	NO	YES	NO	NO	NO	YES	YES	YES	YES	NO	YES
	CANADA	CANADA	P	NO	125V/250V T250mA	NO	YES	NO	NO	NO	YES	YES	YES	YES	NO	YES
	GENERAL MARKET	GENERAL MARKET	M	NO	250V T200mA	YES	YES	YES	NO	NO	YES	YES	YES	YES	YES	NO
DP-1060	AUSTRALIA	AUSTRALIA	X	NO	250V T100mA	NO	YES	NO	NO	NO	YES	NO	YES	YES	NO	YES
	UK	UK	T	NO	250V T100mA	NO	YES	NO	NO	NO	YES	NO	YES	YES	NO	YES
	EUROPE	EUROPE	E	NO	250V T100mA	NO	YES	NO	NO	NO	YES	NO	YES	YES	NO	YES
	GERMANY	GERMANY	G	NO	250V T100mA	NO	YES	NO	NO	NO	YES	NO	YES	YES	NO	YES

EXPLODED VIEW (MECHANISM)

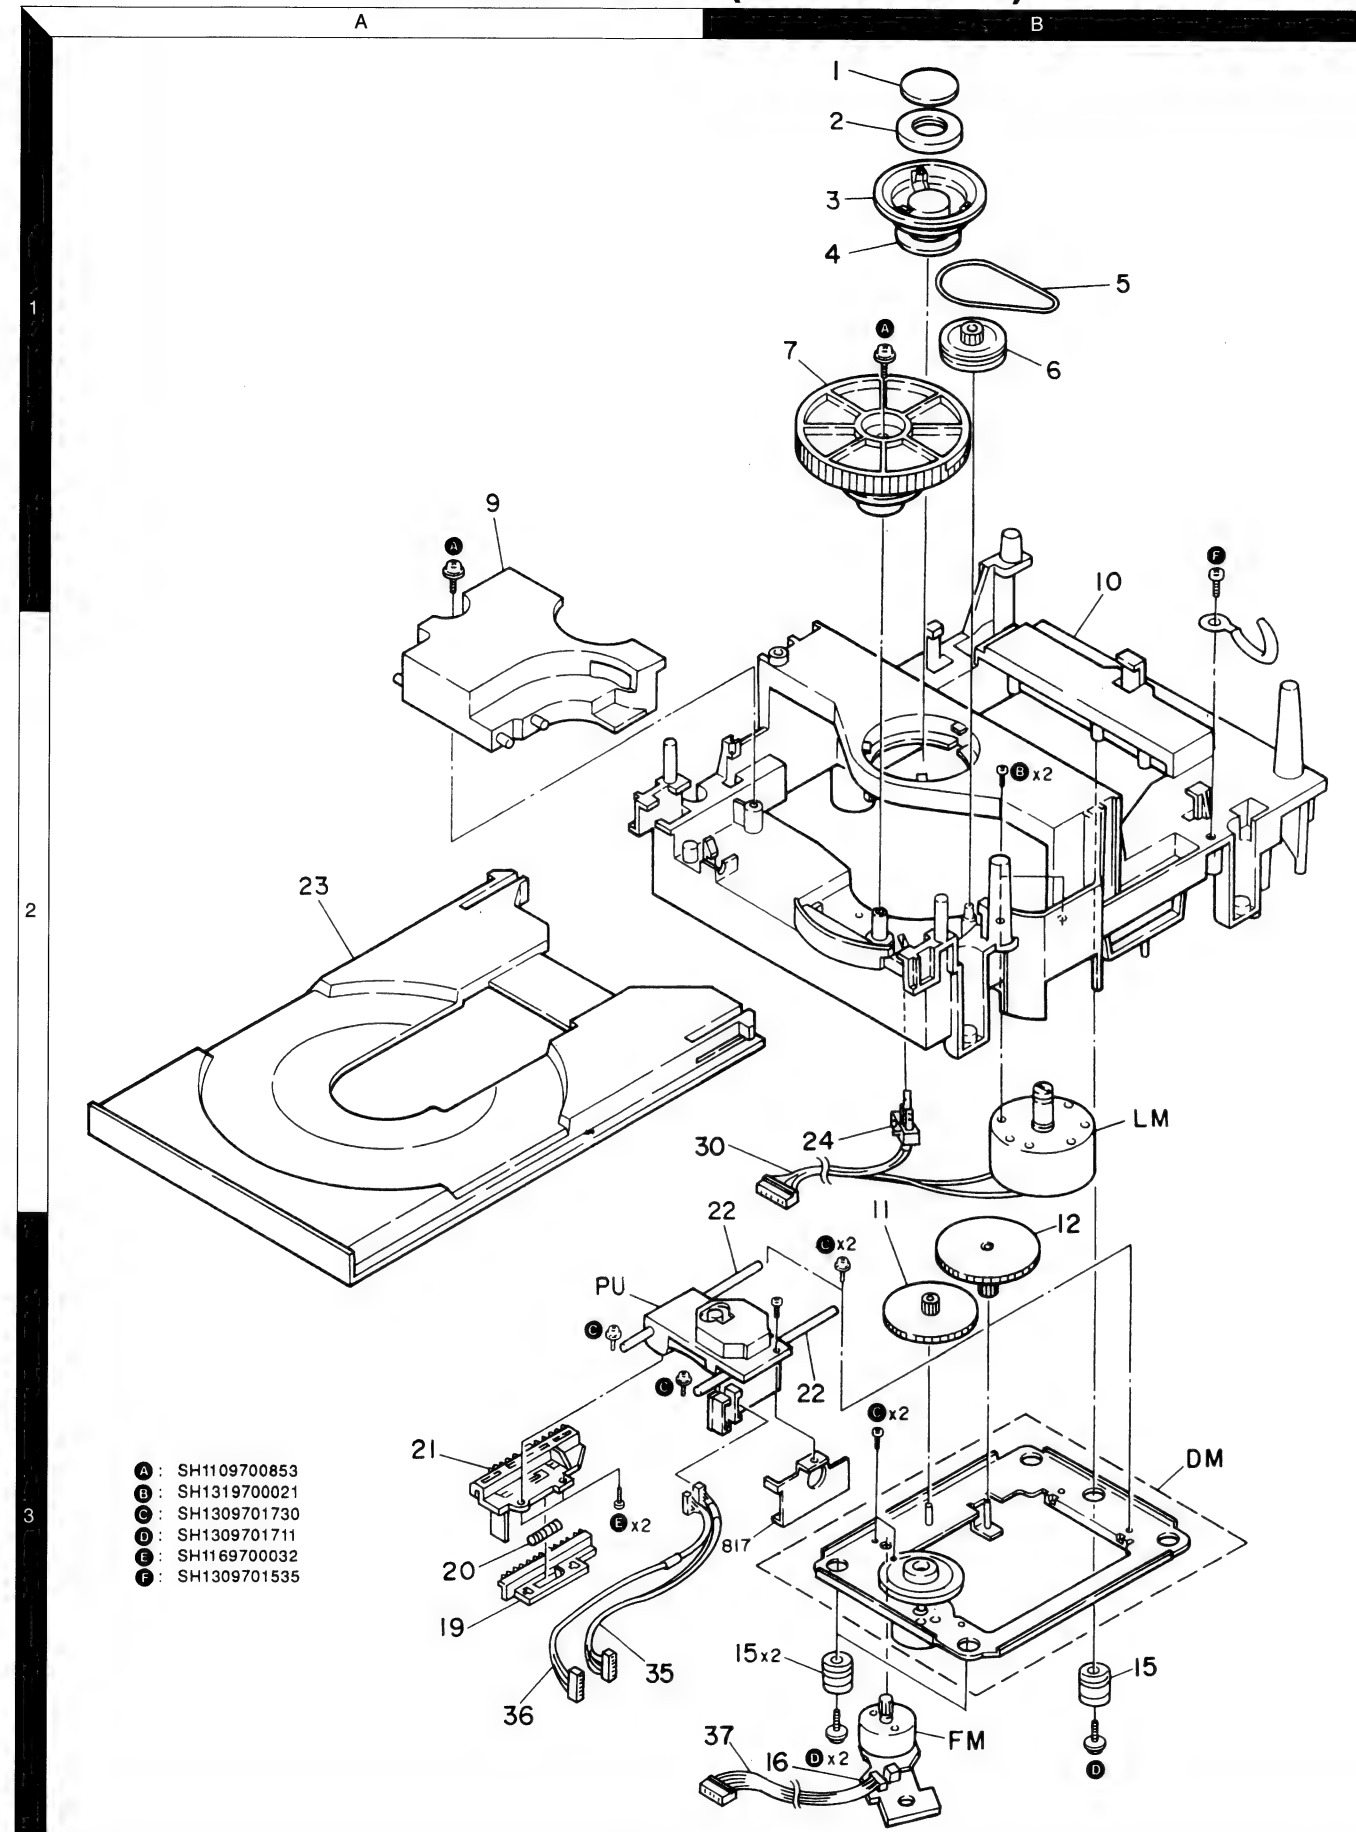


Parts with the exploded numbers larger than 700 are not supplied

EXPLODED VIEW (UNIT)

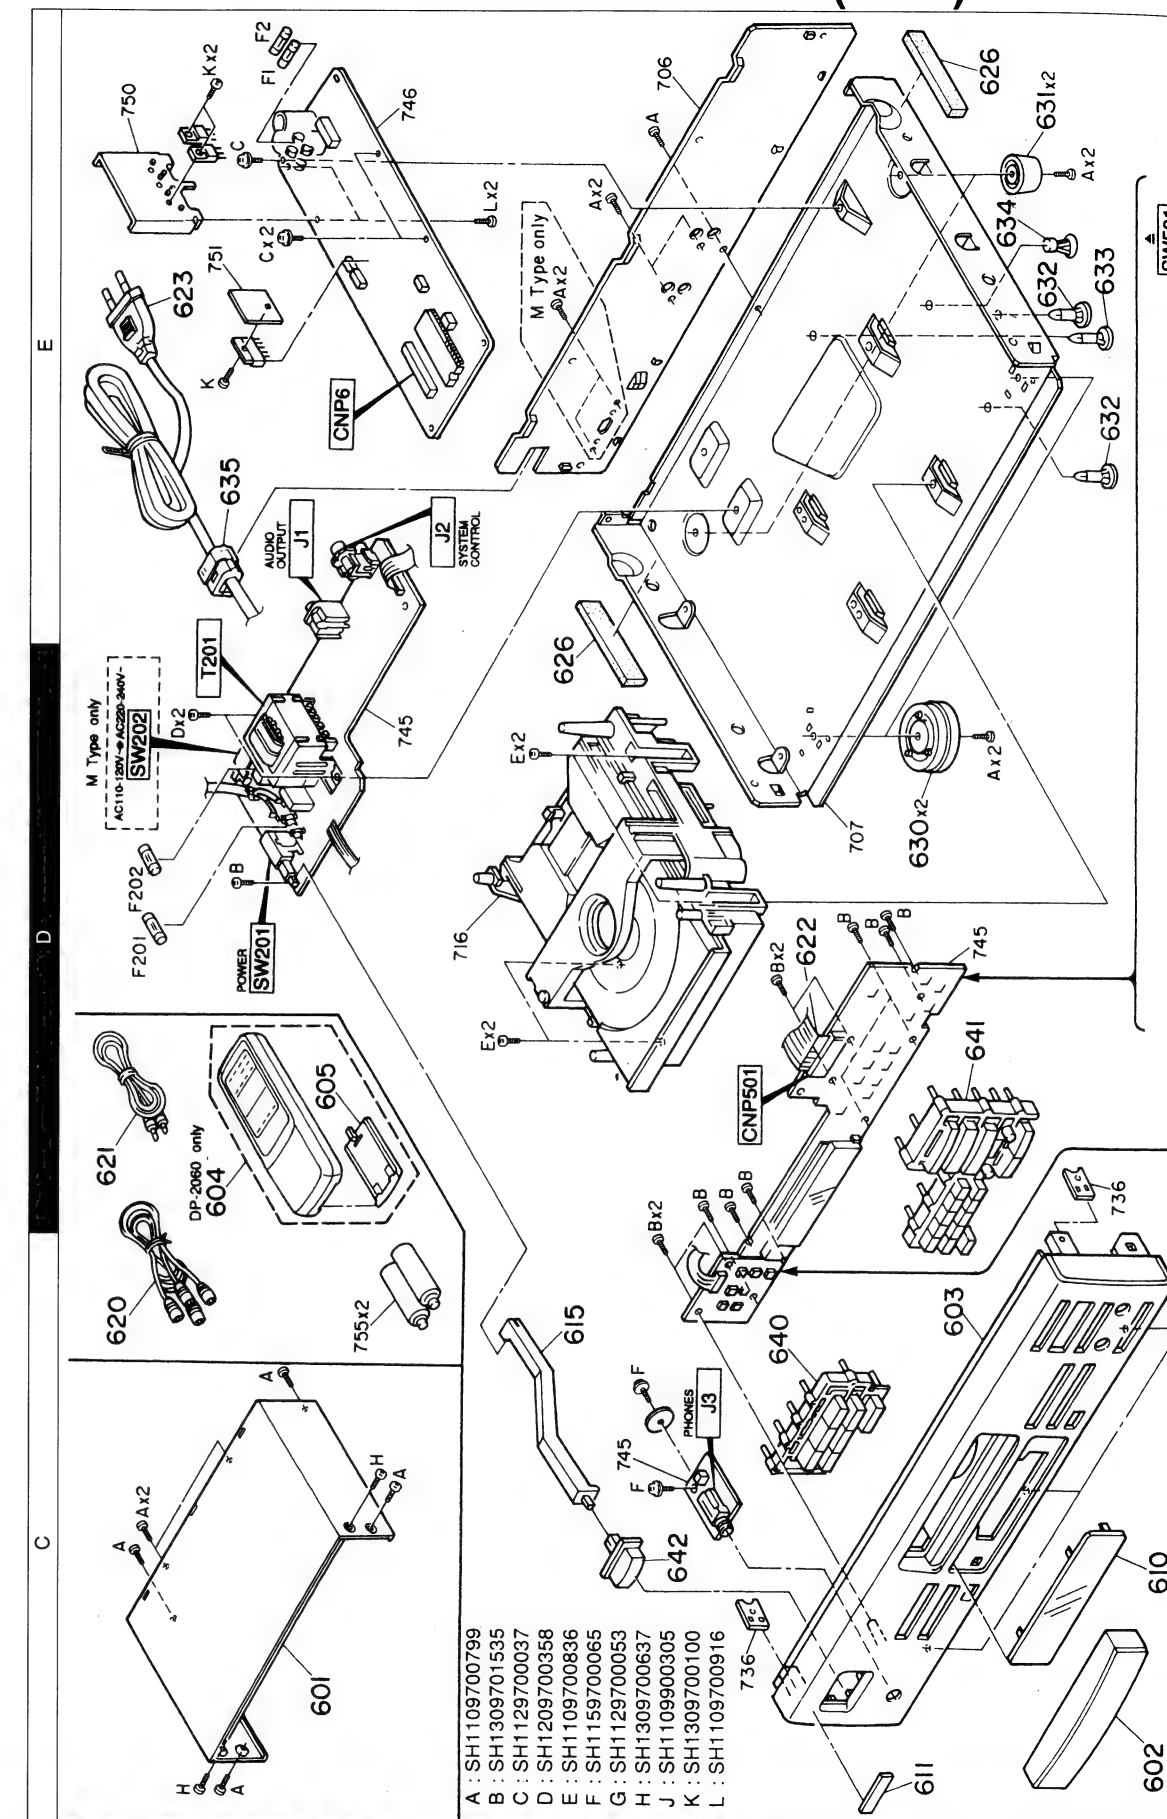

Parts with the exploded numbers larger than 70

EXPLODED VIEW (UNIT)

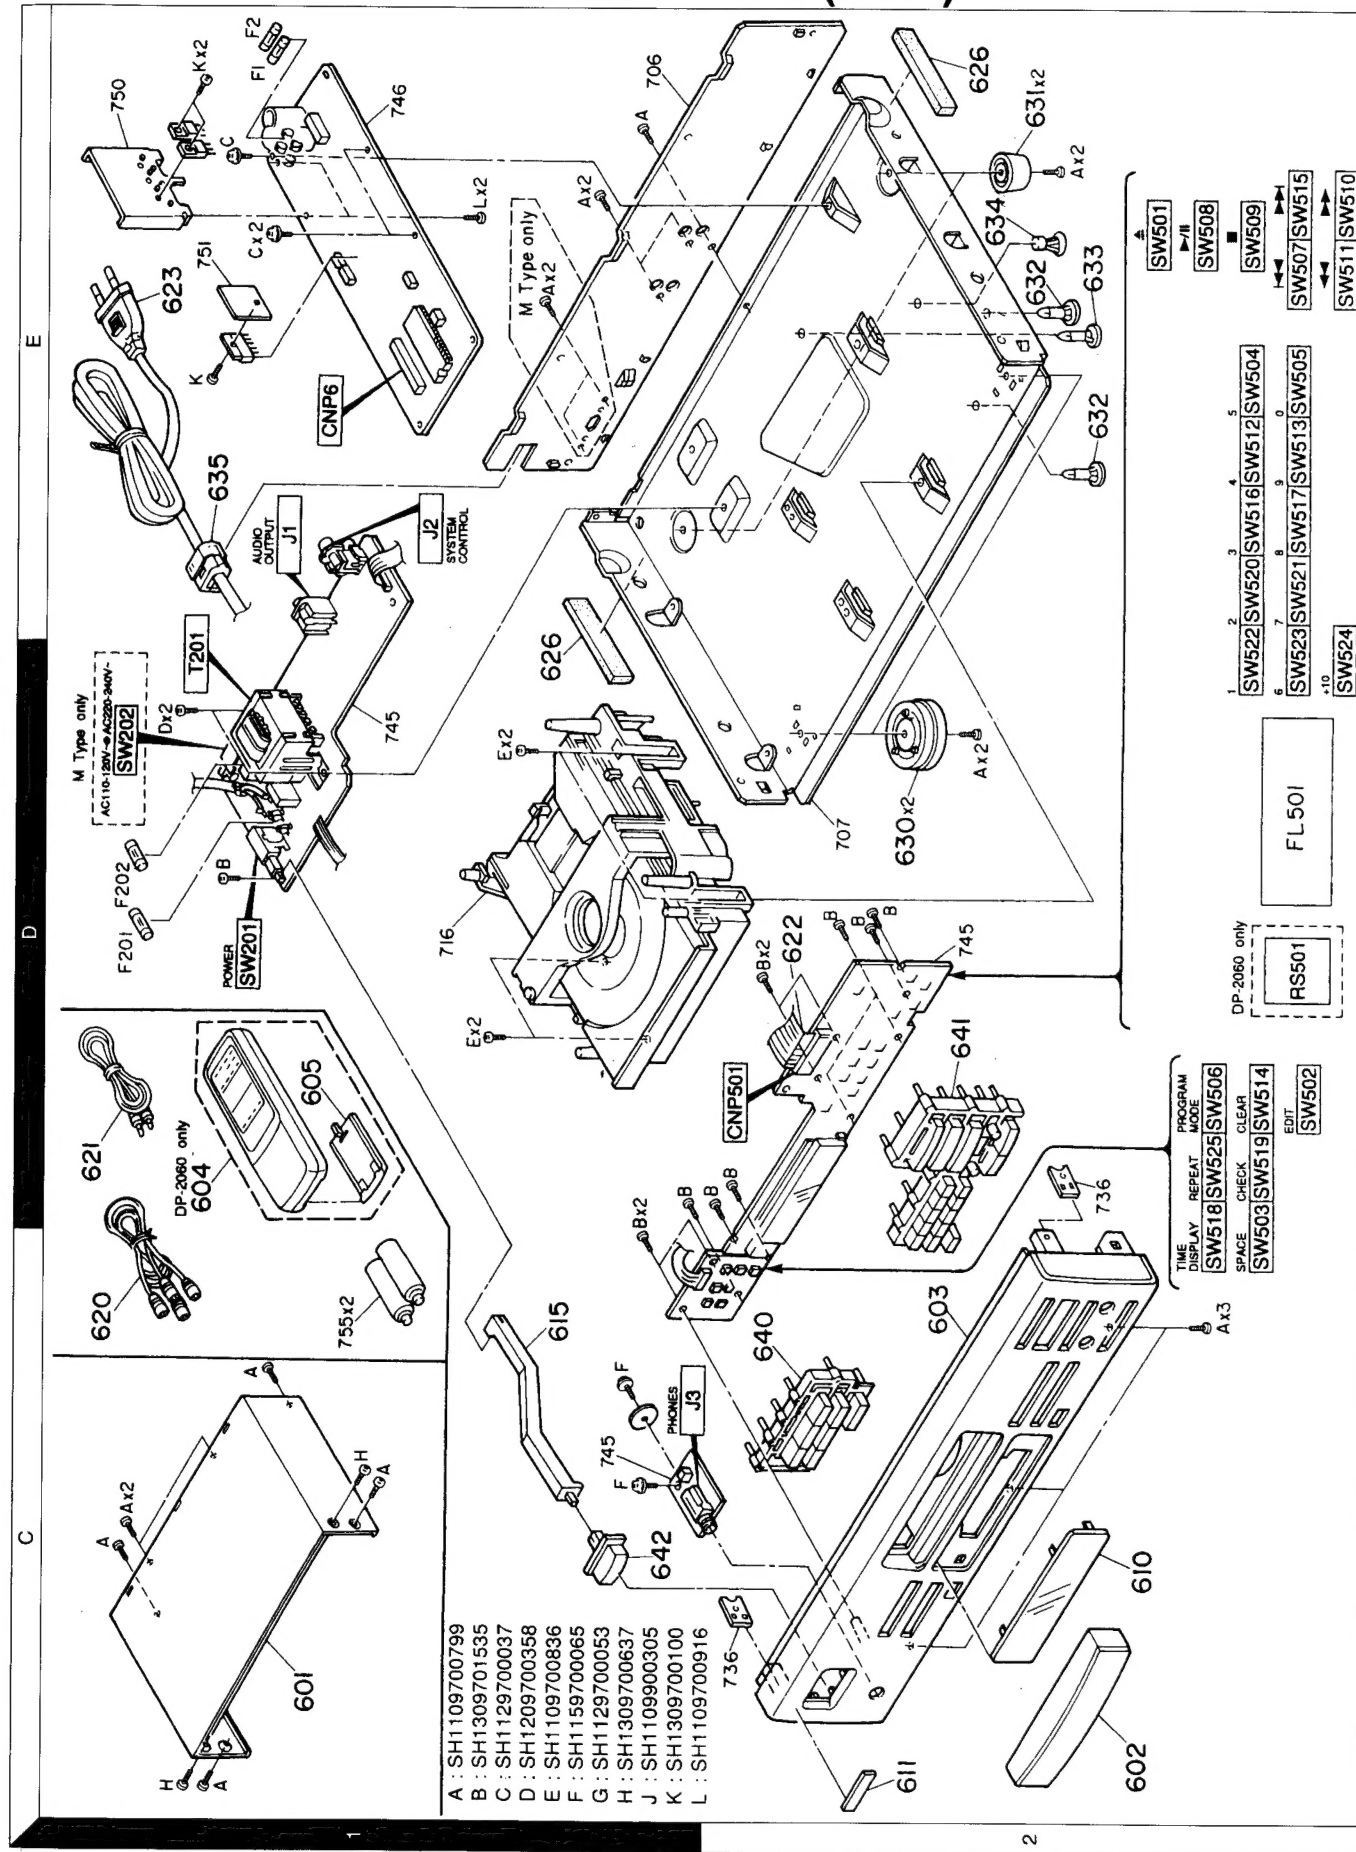

Parts with the exploded numbers larger than 700 are not supplied

PARTS LIST

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位置	Part No. 部品番号	Description 部品名 / 規格	Re- marks 備考
D		SH1209700358	SCREW	
E		SH1109700836	SPECIAL SCREW	
F		SH1159700085	SPECIAL SCREW	
G		SH1129700053	R-ANT SCREW	
H		SH1309700637	WASHER	
J		SH1109900305	SCREW	
K		SH1309700100	SCREW	
L		SH1109700916	SCREW	
ELECTRIC PARTS				
C2		CE04KH1A470K	ELECTRO 470UF 10WV	
C3		CE04KH1A470K	ELECTRO 470UF 10WV	
C4		CE04KH1A470K	ELECTRO 470UF 10WV	
C5		CE04KH1A470K	ELECTRO 470UF 10WV	
C7		CE04KH1A470K	ELECTRO 470UF 10WV	
C8		CE04KH1A470K	ELECTRO 470UF 10WV	
C9		CE04KH1A470K	ELECTRO 470UF 10WV	
C10		CE04KH1A470K	ELECTRO 470UF 10WV	
C11		CE04KH1A470K	ELECTRO 470UF 10WV	
C12		CE04KH1A470K	ELECTRO 470UF 10WV	
C13		CE04KH1A470K	ELECTRO 470UF 10WV	
C14		CE04KH1A470K	ELECTRO 470UF 10WV	
C15		CE04KH1A470K	ELECTRO 470UF 10WV	
C16		CE04KH1A470K	ELECTRO 470UF 10WV	
C17		CE04KH1A470K	ELECTRO 470UF 10WV	
C18		CE04KH1A470K	ELECTRO 470UF 10WV	
C19		CE04KH1A470K	ELECTRO 470UF 10WV	
C20		CE04KH1A470K	ELECTRO 470UF 10WV	
C21		CE04KH1A470K	ELECTRO 470UF 10WV	
C22		CE04KH1A470K	ELECTRO 470UF 10WV	
C23		CE04KH1A470K	ELECTRO 470UF 10WV	
C24		CE04KH1A470K	ELECTRO 470UF 10WV	
C25		CE04KH1A470K	ELECTRO 470UF 10WV	
C26		CE04KH1A470K	ELECTRO 470UF 10WV	
C27		CE04KH1A470K	ELECTRO 470UF 10WV	
C28		CE04KH1A470K	ELECTRO 470UF 10WV	
C29		CE04KH1A470K	ELECTRO 470UF 10WV	
C30		CE04KH1A470K	ELECTRO 470UF 10WV	
C31		CE04KH1A470K	ELECTRO 470UF 10WV	
C32		CE04KH1A470K	ELECTRO 470UF 10WV	
C33		CE04KH1A470K	ELECTRO 470UF 10WV	
C34		CE04KH1A470K	ELECTRO 470UF 10WV	
C35		CE04KH1A470K	ELECTRO 470UF 10WV	
C36		CE04KH1A470K	ELECTRO 470UF 10WV	
C37		CE04KH1A470K	ELECTRO 470UF 10WV	
C38		CE04KH1A470K	ELECTRO 470UF 10WV	
C39		CE04KH1A470K	ELECTRO 470UF 10WV	
C40		CE04KH1A470K	ELECTRO 470UF 10WV	
C41		CE04KH1A470K	ELECTRO 470UF 10WV	
C42		CE04KH1A470K	ELECTRO 470UF 10WV	
C43		CE04KH1A470K	ELECTRO 470UF 10WV	
C44		CE04KH1A470K	ELECTRO 470UF 10WV	
C45		CE04KH1A470K	ELECTRO 470UF 10WV	
C46		CE04KH1A470K	ELECTRO 470UF 10WV	
C47		CE04KH1A470K	ELECTRO 470UF 10WV	
C48		CE04KH1A470K	ELECTRO 470UF 10WV	
C49		CE04KH1A470K	ELECTRO 470UF 10WV	
C50		CE04KH1A470K	ELECTRO 470UF 10WV	
C51		CE04KH1A470K	ELECTRO 470UF 10WV	
C52		CE04KH1A470K	ELECTRO 470UF 10WV	
C53		CE04KH1A470K	ELECTRO 470UF 10WV	
C54		CE04KH1A470K	ELECTRO 470UF 10WV	
C55		CE04KH1A470K	ELECTRO 470UF 10WV	
C56		CE04KH1A470K	ELECTRO 470UF 10WV	
C57		CE04KH1A470K	ELECTRO 470UF 10WV	
C58		CE04KH1A470K	ELECTRO 470UF 10WV	
C59		CE04KH1A470K	ELECTRO 470UF 10WV	
C60		CE04KH1A470K	ELECTRO 470UF 10WV	
C61		CE04KH1A470K	ELECTRO 470UF 10WV	
C62		CE04KH1A470K	ELECTRO 470UF 10WV	
C63		CE04KH1A470K	ELECTRO 470UF 10WV	
C64		CE04KH1A470K	ELECTRO 470UF 10WV	
C65		CE04KH1A470K	ELECTRO 470UF 10WV	
C66		CE04KH1A470K	ELECTRO 470UF 10WV	
C67		CE04KH1A470K	ELECTRO 470UF 10WV	
C68		CE04KH1A470K	ELECTRO 470UF 10WV	
C69		CE04KH1A470K	ELECTRO 470UF 10WV	
C70		CE04KH1A470K	ELECTRO 470UF 10WV	
C71		CE04KH1A470K	ELECTRO 470UF 10WV	
C72		CE04KH1A470K	ELECTRO 470UF 10WV	
C73		CE04KH1A470K	ELECTRO 470UF 10WV	
C74		CE04KH1A470K	ELECTRO 470UF 10WV	
C75		CE04KH1A470K	ELECTRO 470UF 10WV	
C76		CE04KH1A470K	ELECTRO 470UF 10WV	
C77		CE04KH1A470K	ELECTRO 470UF 10WV	

L:Scandinavia
Y:PX(Far East, Hawaii)
Y:AFES(Europe)
K:USA
T:England
X:Australia
P:Canada
E:Europe
M:Other Areas
Δ indicates safety critical components.

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

Ref. No.	Address	New Part	Parts No.	Description	Desti- nation	Re- marks
参照番号	位置	新 番	部品番号	部 品 名 / 規 格	仕	向 備考
DP-1060/DP-2060						
601	1C	*	A01-3205-08	METALLIC CABINET		
602	2C	*	A29-0388-08	PANEL (TRAY)		
603	2C	*	A60-0685-08	PANEL (DP-2060)		
603	2C	*	A60-0686-08	PANEL (DP-1060)		
604	1D	*	A70-0983-05	REMOTE ASSY (DP-2060)		
605	1D	*	A09-0170-08	BATTERY COVER (DP-2060)		
610	2C	*	B10-2077-08	FRONT GLASS		
611	2C	*	B43-0287-04	KEYBOARD BADGE		
-	-	*	B60-1680-08	INSTRUCTION MANUAL(ENGLISH)		
-	-	*	B60-1681-08	INSTRUCTION MANUAL(ENG/FRE)		
-	-	*	B60-1682-08	INSTRUCTION MANUAL(E/S/C)		
-	-	*	B60-1683-08	INSTRUCTION MANUAL(E/F/D/I/S)		
-	-	*	B60-1684-08	INSTRUCTION MANUAL(GERMAN)		
-	-	*	B60-1685-08	INSTRUCTION MANUAL(SPANISH)		
-	-	*	B60-1935-08	INSTRUCTION MANUAL(TIWAN)		
615	1C	*	D21-1780-08	EXTENSION SHAFT		
620	1C	*	E30-0505-08	AUDIO CORD		
621	1D	*	E30-2733-05	CORD WITH PLUG		
622	2D	*	E35-1046-08	FLAT CABLE		
623	1E	*	E30-0459-05	AC POWER CORD		MEG KPR
623	1E	*	E30-0974-05	AC POWER CORD		X T
623	1E	*	E30-2750-08	AC POWER CORD		
623	1E	*	E30-2753-08	AC POWER CORD		
626	1D,2E	*	G10-0199-08	CHASSIS CUSHION		
-	-	*	H10-5962-08	POLYSTYRENE FOAMED FIXTURE		
-	-	*	H10-5963-08	POLYSTYRENE FOAMED FIXTURE		
-	-	*	H25-1542-08	PROTECTION BAG		
-	-	*	H50-1159-08	ITEM CARTON CASE(DP-2060)		KPRXTE G
-	-	*	H50-1159-08	ITEM CARTON CASE(DP-2060)		
-	-	*	H50-1160-08	ITEM CARTON CASE(DP-2060)		M
-	-	*	H50-1161-08	ITEM CARTON CASE(DP-1060)		M
-	-	*	H50-1162-08	ITEM CARTON CASE(DP-1060)		M
630	2D	*	J02-1034-05	FOOT		
631	2E	*	J02-1220-08	FOOT		
632	2E	*	J16-3732-08	UNIT HOLDER		
633	2E	*	J16-3732-08	UNIT HOLDER		
634	2E	*	J19-3755-08	UNIT HOLDER		
635	1E	*	J42-0083-05	AC CORD BUSHING		
-	-	*	SH1309330057	NYLON BAND		
640	2C	*	K29-6074-08	KNOB		
641	2C	*	K29-6075-08	KNOB		
642	1C	*	K29-6076-08	KNOB (POWER)		
T201	1D	*	L07-1867-08	POWER TRANSFORMER		KPR
T201	1D	*	L07-1868-08	POWER TRANSFORMER		M
T201	1D	*	L07-1869-08	POWER TRANSFORMER		XT
T201	1D	*	L07-1870-08	POWER TRANSFORMER		EG
A	B	*	SH1109700799	SCREW		
B	B	*	SH1309701535	SCREW		
C	B	*	SH129700037	SPECIAL SCREW		

★ New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位置	Parts No. 部品番号	Description 部品名 / 規格	Re- marks 備考
DP-1060/DP-2060				
601	1C	A01-3205-08	METALLIC CABINET	
602	2C	A29-0388-08	PANEL (TRAY)	
603	2C	A60-0685-08	PANEL (DP-2060)	
604	1D	A60-0686-08	PANEL (DP-1060)	
605	1D	A70-0983-05	REMOCON ASSY (DP-2060)	
610	2C	A09-0170-08	BATTERY COVER (DP-2060)	
611	2C	B10-2077-08	FRONT GLASS	
-	-	B43-0287-04	KENWOOD BADGE	
-	-	B60-1680-08	INSTRUCTION MANUAL (ENGLISH)	
-	-	B60-1681-08	INSTRUCTION MANUAL (ENG/FRE)	
-	-	B60-1682-08	INSTRUCTION MANUAL (E/S/C)	
-	-	B60-1683-08	INSTRUCTION MANUAL (E/F/D/I/S)	
-	-	B60-1684-08	INSTRUCTION MANUAL (SPANISH)	
-	-	B60-1685-08	INSTRUCTION MANUAL (GERMAN)	
-	-	B60-1935-08	INSTRUCTION MANUAL (TIMAN)	
615	1C	D21-1780-08	EXTENSION SHAFT	
620	1C	E30-0505-05	AUDIO CORD	
621	1D	E30-2733-05	CORD WITH PLUG	
622	2D	E35-1046-08	FLAT CABLE	
623	1E	E30-0459-05	AC POWER CORD	
623	1E	E30-0974-05	AC POWER CORD	
623	1E	E30-2750-08	AC POWER CORD	
623	1E	E30-2753-08	AC POWER CORD	
626	1D, 2E	G10-0199-08	CHASSIS CUSHION	
-	-	H10-5962-08	POLYSTYRENE FOAMED FIXTURE	
-	-	H10-5963-08	PROTECTION BAG	
-	-	H25-1542-08	ITEM CARTON CASE (DP-2060)	
-	-	H50-1159-08	ITEM CARTON CASE (DP-2060)	
-	-	H50-1159-08	ITEM CARTON CASE (DP-2060)	
-	-	H50-1160-08	ITEM CARTON CASE (DP-2060)	
-	-	H50-1161-08	ITEM CARTON CASE (DP-1060)	
-	-	H50-1162-08	ITEM CARTON CASE (DP-1060)	
630	2D	J02-1034-05	FOOT	
631	2E	J02-1120-08	UNIT HOLDER	
632	2E	J19-3737-08	UNIT HOLDER	
633	2E	J19-3738-08	UNIT HOLDER	
634	2E	J19-3739-08	UNIT HOLDER	
635	1E	J42-0083-05	AC CORD BUSHING	
-	-	SH1309330057	NYLON BAND	
640	2C	K29-6074-08	KNOB	
641	2D	K29-6075-08	KNOB	
642	1C	K29-6076-08	KNOB (POWER)	
T201	1D	L07-1867-08	POWER TRANSFORMER	
T201	1D	L07-1868-08	POWER TRANSFORMER	
T201	1D	L07-1869-08	POWER TRANSFORMER	
T201	1D	L07-1870-08	POWER TRANSFORMER	
A	-	SH1109700799	SCREW	
B	-	SH1309701535	SCREW	
C	-	SH1129700037	SPECIAL SCREW	

L:Scandinavia K:USA P:Canada G:Germany
Y:PX(Far East, Hawaii) T:England E:Europe R:Mexico
Y:AFES(Europe) X:Australia M:Other Areas

△ indicates safety critical components.

★ New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位置	Parts No. 部品番号	Description 部品名 / 規格	Re- marks 備考
C96		CC410SL1H100J	CYLND CHIP C 10PF	
C97		CC410SL1H9R2D	CYLND CHIP C 8-2PF	
C98		CC45FB1H103Z	CERAMIC 0.010UF Z	
C99		CE04KW1A470M	ELECTR0 47UF 10WV	
C100		CK450B1H473Z	CERAMIC 0.047UF Z	
C103, 104		CK410B1H221K	CYLND CHIP C 220PF	
C105-108		CK410B1H210K	CYLND CHIP C 100PF	
C109, 110		CE04KW1H100M	ELECTR0 10UF 50WV	
C113, 114		CK45FB1H103Z	CERAMIC 0.010UF Z	
C151		CE04KW1C682M	ELECTR0 6800UF 16WV	
C152		CE04KW1E222Z	ELECTR0 2200UF 25WV	
C153, 154		CK410B1E223Z	CYLND CHIP C 0.022UF Z	
C155, 156		CE04KW1A470M	ELECTR0 47UF 10WV	
C157, 158		CE04KW1H100M	ELECTR0 10UF 50WV	
C159-161		CE04KW1A221M	ELECTR0 220UF 10WV	
C162		CE04KW1A470M	ELECTR0 47UF 10WV	
C163		CE04KW1E221M	ELECTR0 220UF 25WV	
C164		CE04KW1V221M	ELECTR0 220UF 35WV	
C165		CE04KW1H101M	ELECTR0 100UF 50WV	
C166		CE04KW1E101M	ELECTR0 100UF 25WV	
C167, 168		CK45FB1H103Z	CERAMIC 0.010UF Z	
C169		CE04KW1A470M	ELECTR0 47UF 10WV	
C170		CE04KW1A101M	ELECTR0 100UF 10WV	
C171		CK45FB1H103Z	CERAMIC 0.010UF Z	
C172C, 173	C	CE04KW1H101M	ELECTR0 100UF 50WV	
C201, 202		CE04KW1H100M	ELECTR0 10UF 50WV	
C203, 204		CE04KW1A101M	ELECTR0 100UF 10WV	
C205, 206		CK45FSL1H471J	CERAMIC 470PF J	
C207, 208		CK45FSL1H221K	CERAMIC 220PF K	
C209, 210		CK45FB1H103Z	CERAMIC 0.010UF Z	
C211, 212		CK45FB1H473Z	CERAMIC 0.047UF Z	
C213, 214		CE04KW1H100M	ELECTR0 10UF 50WV	
C215		CK45FB1H103Z	CERAMIC 0.010UF Z	
C221		SH110500386	CERAMIC 0.047UF M	
C251, 252		CK45FB1H471K	CERAMIC 470PF K	
C253		CK45FB1H473Z	CERAMIC 0.047UF Z	
C501		CK45FB1H103Z	CERAMIC 0.010UF Z	
CNP6	1E	E40-3871-05	FLAT CABLE CONNECTOR	
CNP501	2D	E40-4211-05	PHONE JACK (AUDIO OUTPUT)	
J1	1E	E63-0112-08	MINIATURE PHONE JACK (SYS/COM)	
J2	1E	E11-0188-05	PHONE JACK (PHONES)	
J3	1C	E11-0258-08	FUSE (DP-2060)	
F1, 2	1E	F05-5016-05	FUSE (DP-2060)	
F201	1D	F05-0061-08	FUSE	
F201	1D	F05-1014-05	FUSE	
F201	1D	F05-1026-05	FUSE	
F201	1D	F05-0051-08	FUSE	
F202	1D	F05-2015-05	FUSE	
FH201, 202	1E	J13-0075-05	FUSE HOLDER	
L1, 2		L40-8281-17	CHOKE COIL	
L5		L40-8281-17	CHOKE COIL	
L7		L40-8281-17	CHOKE COIL	
L201-206		L40-8281-17	CHOKE COIL	

L:Scandinavia K:USA P:Canada G:Germany
Y:PX(Far East, Hawaii) T:England E:Europe R:Mexico
Y:AFES(Europe) X:Australia M:Other Areas

△ indicates safety critical components.

★ New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位置	Parts No. 部品番号	Description 部品名 / 規格	Re- marks 備考
D		SH1209700358	SCREW	
E		SH1109700836	SPECIAL SCREW	
F		SH1159700065	SPECIAL SCREW	
G		SH1129700053	R-ANT SCREW	
H		SH1309700637	WASHER	
J		SH1109900305	SCREW	
K		SH1309700100	SCREW	
L		SH1109700916	SCREW	
ELECTRIC PARTS				
C2		CE04KW1A470M	ELECTR0 47UF 10WV	
C3		CK410B1C472K	CYLND CHIP C 4700PF	
C4		CC410SL1H330J	CYLND CHIP C 33PF	
C5		CE04KW1A101M	ELECTR0 100UF 10WV	
C7		CK410B1C822M	CYLND CHIP C 8200PF	
C8		CC410SL1H330J	CYLND CHIP C 33PF	
C9		CE04KW1H222M	ELECTR0 0.22UF	
C10		CE04KW1H101M	ELECTR0 10UF 50WV	
C11		CE04KW1H101M	ELECTR0 10UF 50WV	
C12		CE04KW1H011M	ELECTR0 0.1UF	
C13		CK45FB1H393K	CERAMIC 0.039UF	
C14		CE04KW1H100M	ELECTR0 10UF 50WV	
C15		CE04KW1H011M	ELECTR0 0.1UF 50WV	
C16		CK410B1H221K	CYLND CHIP C 220PF	
C17		CE04KW1H471M	ELECTR0 0.47UF 50WV	
C18		CK410B1H102K	CYLND CHIP C 1000PF	
C19		CK410B1E223Z	CYLND CHIP C 0.022UF	
C20		CK45FB1H333K	CERAMIC 0.033UF	
C22		CK410B1H221K	CYLND CHIP C 220PF	
C23		CK45FB1H104K	CERAMIC 0.10UF	
C24		CK410B1C103K	CYLND CHIP C 0.010UF	
C25		CE04KW1A470M	ELECTR0 47UF 10WV	
C26		CK41FB1H272M	CYLND CHIP C 2700PF	
C27		CK410B1C152K	CYLND CHIP C 1500PF	
C28		CE04KW1H471M	ELECTR0 4.7UF 50WV	
C29		CC410SL1H010C	CYLND CHIP C 1.0PF	
C30		CC410SL1H100J	CYLND CHIP C 10PF	
C31		CQ92FM1H104J	MYLAR 0.10UF	
C32		CE04KW1A470M	ELECTR0 47UF 10WV	
C33		CK410B1C103K	CYLND CHIP C 0.010UF	
C34		CE04KW1H282M	ELECTR0 2.2UF 50WV	
C51		CK410B1H12K	CYLND CHIP C 1000PF	
C52		CK45FB1H333K	CERAMIC 0.033UF	
C53		CK45FB1H181K	CERAMIC 180PF	
C54		CK41FB1H151K	CYLND CHIP C 150PF	
C55		CE04KW1A470M	ELECTR0 47UF 10WV	
C61		CK410B1E223Z	CYLND CHIP C 0.022UF	
C62	-66	CK410B1H471K	CYLND CHIP C 470PF	
C67, 68		CK410B1E223Z	CYLND CHIP C 0.022UF	
C70, 71		CE04KW1A470M	ELECTR0 47UF 10WV	
C72		CK410B1C103K	CYLND CHIP C 0.010UF	
C73		CK410B1H101K	CYLND CHIP C 100PF	
C76		CK45FB1H103Z	CERAMIC 0.010UF	
C77		CK41FB1H221K	CYLND CHIP C 220PF	

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AFES(Europe) X:Australia M:Other Areas

△ indicates safety critical components.

★ New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位置	Parts No. 部品番号	Description 部品名 / 規格	Re- marks 備考
L251-253		L40-8281-17	CHOKE COIL	
XL1		L77-2132-08	CRYSTAL RESONATOR(16.9344MHz)	
R1		L78-0267-05	RESONATOR(4.19MHz)	
R2		RD41D82B103J	CARBON 10K J 1/8W	
R3		RD41D82B822J	CARBON 8.2K J 1/8W	
R4		RD41D82B681J	CARBON 6.8K J 1/8W	
R5		RD41D82B152J	CARBON 1.5K J 1/8W	
R6		RD41D82B332J	CARBON 3.3K J 1/8W	
R7		RD41D82B564J	CARBON 560K J 1/8W	
R8		RD41D82B334J	CARBON 330K J 1/8W	
R9		RD41D82B563J	CARBON 56K J 1/8W	
R10		RD41D82B823J	CARBON 82K J 1/8W	
R11		RD41D82B124J	CARBON 120K J 1/8W	
R12		RD41D82B822J	CARBON 8.2K J 1/8W	
R13		RD41D82B124J	CARBON 120K J 1/8W	
R14		RD41D82B681J	CARBON 680K J 1/8W	
R16		RD41D82B684J	CARBON 680K J 1/8W	
R17		RD41D82B473J	CARBON 47K J 1/8W	
R18		RD41D82B472J	CARBON 4.7K J 1/8W	
R19		RD41D82B223J	CARBON 2.2K J 1/8W	
R20		RD41D82B103J	CARBON 10K J 1/8W	
R21		RD41D82B393J	CARBON 39K J 1/8W	
R22		RD41D82B102J	CARBON 1K J 1/8W	
R23		RD41D82B682J	CARBON 6.8K J 1/8W	
R26		RD41D82B334J	CARBON 330K J 1/8W	
R27		RD41D82B394J	CARBON 390K J 1/8W	
R28		RD41D82B104J	CARBON 100K J 1/8W	
R30		RD41D82B103J	CARBON 10K J 1/8W	
R31		RD41D82B104J	CARBON 100K J 1/8W	
R32		RD41D82B332J	CARBON 3.3K J 1/8W	
R33		RD41D82B563J	CARBON 5.6K J 1/8W	
R34		RD41D82B564J	CARBON 56K J 1/8W	
R40		RD41D82B393J	CARBON 39K J 1/8W	
R41		RD41D82B562J	CARBON 5.6K J 1/8W	
R42		RD41D82B562J	CARBON 5.6K J 1/8W	
R43		RD41D82B102J	CARBON 1K J 1/8W	
R51		RD41D82B204J	CARBON 200K J 1/8W	
R52		RD41D82B104J	CARBON 100K J 1/8W	
R53		RD41D82B223J	CARBON 2.2K J 1/8W	
R54		RD41D82B153J	CARBON 15K J 1/8W	
R56		RD41D82B473J	CARBON 47K J 1/8W	
R57		RD41D82B561J	CARBON 560 J 1/8W	
R59		RD41D82B102J	CARBON 1K J 1/8W	
R66		RD41D82B153J	CARBON 15K J 1/8W	
R67		RD41D82B152J	CARBON 1.5K J 1/8W	
R68		RD41D82B103J	CARBON 10K J 1/8W	
R69		RD41D82B103J	CARBON 10K J 1/8W	
R70, 71		RD41D82B222J	CARBON 2.2K J 1/8W	
R72	-74	RD41D82B103J	CARBON 10K J 1/8W	
R75		RD41D82B104J	CARBON 100K J 1/8W	
R77		RD41D82B104J	CARBON 100K J 1/8W	
R79		RD41D82B104J	CARBON 100K J 1/8W	
R81		RD41D82B104J	CARBON 100K J 1/8W	

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AFES(Europe) X:Australia M:Other Areas

△ indicates safety critical components.

PARTS LIST

PARTS LIST

PARTS LIST

★ New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位置	New Parts	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕	Re- marks 備考
Q11			2SB1237R3	TRANSISTOR		
Q12			2TC114YS	TRANSISTOR		
Q201-204			2SC2879B	TRANSISTOR		
RS501	2D		402-1174-05	ELECTRIC MODULE (DP-2060)		
MECHANISM PARTS						
1	1B		150-1067-08	MAGNET SUPPORT		
2	1B		SH1313730001	MAGNET		
3	1B	*	SH1102140396	MAGNET HOLDER		
4	1B		G13-0402-08	MAGNET CUSHION		
5	1B		D16-0362-08	DRIVE BELT		
6	1B		D15-0364-08	DRIVE PULLEY		
7	1B		SH102810098	PISTON GEAR		
10	1B		A11-1021-08	LOADING CHASSIS		
11	2B		SH1302810228	GEAR (MIDDLE)		
12	2B		SH1302810229	GEAR (DRIVE)		
15	3B		SH1303260448	CUSHION		
16	3B	*	SH1305301248	PUSH AMATCH(SLT)		
19	3A		SH1302810232	GEAR (RACK MOVE)		
20	3A		SH125280244	SPRING (RACK)		
21	3A		SH1302810231	GEAR (RACK FIX)		
22	2B, 3B		SH1302900394	SHAFT (GUIDE)		
23	2A		SH1102140395	DISC TRAY		
24	2B		S74-0027-08	LEAF SW (OPEN/CLOSE)		
30	2B	*	E35-1053-08	WIRING HARNESS		
35	3A	*	E35-1050-08	WIRING HARNESS		
36	3A	*	E35-1051-08	WIRING HARNESS		
37	3B	*	E35-1052-08	WIRING HARNESS		
A			SH1109700853	SPECIAL SCREW		
B			SH1318700021	SPECIAL SCREW		
C			SH1309701730	SCREW		
D			SH1309701711	SCREW+WASHER 3R2W13-1S		
E			SH1189700032	SCREW		
F			SH1309701535	SCREW		
DM	3B	*	SH1306300457	DISC MOTOR		
FM	3B		SH1256300127	FEED MOTOR		
LH	2B		SH1106300200	MOTOR		
PU	3A		T25-0032-08	CD PICKUP ASSY		

★ New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位置	New Parts	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕	Re- marks 備考
R82			R041DB28472J	CARBON		
R83			R041DB28683J	4.7K J 1/8W		
R84 -87			R041DB28104J	68K J 1/8W		
R88 ,89			R041DB28331J	100K J 1/8W		
R92			R041DB28104J	330 J 1/4W		
			R041DB28104J	100K J 1/8W		
R97			R041DB28222J	CARBON		
R101-104			R041DB28103J	2-2K J 1/8W		
R105-108			R041DB28332J	10K J 1/8W		
R109-112			R041DB28183J	3.3K J 1/8W		
R113,114			R041DB28104J	18K J 1/8W		
R156			R041DB28101J	CARBON		
R158-161			R041DB28471J	100 J 1/8W		
R162-169			R041DB28470J	CARBON		
VR1			R12-2048-08	470 J 1/8W		
VR2			R12-1619-05	TRIMMING POT(6.8K)<T.BALANCE>		
VR3			R12-3685-05	TRIMMING POT(4.7K)<T.GAIN>		
VR4			R12-3651-05	TRIMMING POT(10K)<F.GAIN>		
SW10			SH1305301218	TRIMMING POT(100K)<VCO>		
SW201			SW1305301218	SWITCH (TEST, MODE)		
SW202			S68-0036-08	SWITCH (POWER)		
SW501-525			S62-0001-05	SWITCH (VOLTAGE)		
			SH1305301218	SWITCH (EJECT etc)		
D1 -5			1S5133T	D100E		
D7			1S5133T	D100E		
D9 ,10			1S5133T	D100E		
D11 ,12			RL104T	D100E		
D13		*	11ES4T	D100E		
D14 -18			1S5133T	D100E		
D201,202	1D		1S5133T	D100E		
D251,252			1S5133T	D100E		
D501-509			1S5133T	D100E		
FL501	2D		10-BT-67GK	INDUCTOR TUBE		
ZD2 -4		*	MTZJ9R1A	ZENER DIODE		
ZD5		*	MTZJ30B	ZENER DIODE		
ZD6 ,7		*	MTZJ6R8B	ZENER DIODE		
IC1			LA9211M	IC		
IC2			LC78481E	IC		
IC3			TC9268P	IC		
IC4			JPD75216ACW-W75	IC		
IC5			PST600D	IC		
IC6			LA6524	IC		
IC7			TA7291S	IC(BRIDGE DRIVER)		
IC8			TA76105AP	IC(VOLTAGE REGULATOR/ +5V)		
IC9			AN78L05T	IC		
IC10			AN78L05T	IC		
IC11			NJM4560D	IC(OP AMP X2)		
IC12			NJM4558M	IC(OP AMP X2)		
IC201,202			NJM4560D	IC(OP AMP X2)		
Q1 ,2			DTC114YS	TRANSISTOR		
Q4			DTC114YS	TRANSISTOR		
Q5			2SA1015GR	TRANSISTOR		
Q7			2SC1740SR	TRANSISTOR		
Q8			2SA933SR	TRANSISTOR		
Q9			2S02012	TRANSISTOR		
Q10			2SB1375	TRANSISTOR		

△ indicates safety critical components.

LS:Scandinavia
Y:PK(Far East, Hawaii)
Y:AAFE(S:Europe)
K:USA
T:England
X:Australia
P:Canada
E:Europe
M:Other Areas

△ indicates safety critical components.

LS:Scandinavia
Y:PK(Far East, Hawaii)
Y:AAFE(S:Europe)
K:USA
T:England
X:Australia
P:Canada
E:Europe
M:Other Areas

DP-1060/2060

SPECIFICATIONS

[Format]

System Compact disc digital audio system
Laser Semiconductor laser
Number of channels 2 channels
playing rotation 200 rpm ~ 500 rpm (CLV)

[D/A Convertors]

D/A Conversion 1 Bit
Oversampling 8 fs (352.8 kHz)

[Audio]

Frequency response 8 Hz ~ 20 kHz \pm 1.0 dB
Signal to noise ratio More than 94 dB
Dynamic range More than 92 dB
Total harmonic distortion Less than 0.005%

Channel separation More than 83 dB
Wow & flutter Unmeasurable limit
Output level/impedance
Fixed 2.0V/3.3k Ω
Headphone output 6mW (32 Ω)

[General]

Power consumption 12W
Dimensions W: 440 mm (17 - 5/16")
H: 106 mm (4 - 3/16")
D: 310 mm (12 - 3/16")
Weight (Net) 3.8 kg (8.4 lb)

Note:

KENWOOD follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.

Note:

Component and circuitry are subject to modification to insure best operation under differing local conditions. This manual is based on Europe (E) standard, and provides information on regional circuit modification through use of alternate schematic diagrams, and information on regional component variations through use of parts list.

KENWOOD CORPORATION

14-6, Dogenzaka 1-chome, Shibuya-ku, Tokyo, 150 Japan

KENWOOD SERVICE CORPORATION

P.O. BOX 22745, 2201 East Dominguez St., Long Beach, CA 90801-5745, U.S.A.

KENWOOD ELECTRONICS CANADA INC.

6070 Kestral Road, Mississauga, Ontario, Canada L5T 1S8

KENWOOD ELECTRONICS LATIN AMERICA S.A.

P.O. BOX 55-2791, Piso 6 plaza Chase, Cl. 47 y Aquilino de la Guardia Panamá, Republic de Panama

TRIO-KENWOOD U.K. LIMITED

KENWOOD House, Dwight Road, Watford, Herts., WD1 8EB., United Kingdom

KENWOOD ELECTRONICS BENELUX N.V.

Meachelsesteenweg 418, B-1930 Zaventem, Belgium

KENWOOD ELECTRONICS DEUTSCHLAND GMBH

Riembrücker Str. 15, 63150 Heusenstamm, Germany

TRIO-KENWOOD FRANCE S.A.

13 Boulevard Ney, 75018 Paris, France

KENWOOD ELECTRONICS ITALIA S.p.A.

Via G. Sirtori, 7/9 20129, Milano, Italy

KENWOOD ESPANA S.A.

Bolivia, 239-08020 Barcelona, Spain

KENWOOD ELECTRONICS AUSTRALIA PTY. LTD. (A.C.N. 001499 074)

P.O. Box 504, 8 Figtree Drive, Australia Centre, Homebush, N.S.W. 2140, Australia

KENWOOD & LEE ELECTRONICS, LTD.

Unit 3712-3724, Level 37, Tower 1, Metroplaza, 223 Hing Fong Road, Kwai Fong, T.T., Hong Kong

KENWOOD ELECTRONICS SINGAPORE PTE LTD.

No. 1 Genting Lane # 07-00, KENWOOD Building, Singapore, 1334